



ABRASION/MECHANICAL


Expando® TCP V0

Product Highlights

- Working temperature
-50°C to +150°C
(-58°F to +302°F)
- 1 : 2 expansion ratio
- Self extinguishable
- Zero halogen
- UL 94 V0 (raw material)
- Excellent abrasion
resistance

Installation Features

- Flexible
- Bundling solution

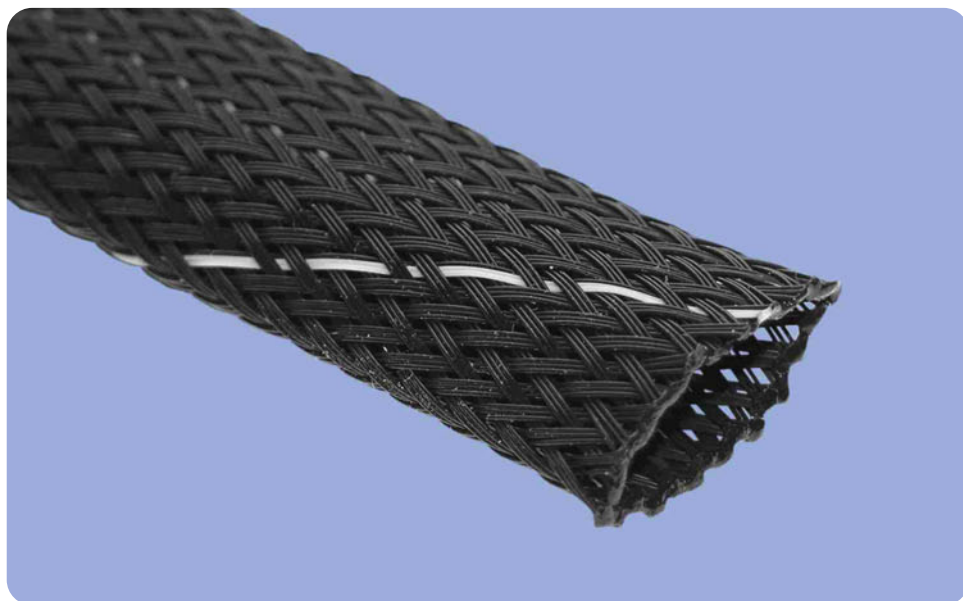

Expando® TCP V0 is an expandable braided sleeve manufactured from modified polyester monofilaments classified UL 94 V0 which are offering excellent flame-retardant properties. It is designed for the protection of tubing and the maintenance of wire and cable bundles.

This product has a highly expandable structure which allows for easy installation over long lengths even after the fitting of end connectors. Expando TCP V0 has an expansion ratio which enables a large number of diameters to be covered with a limited range of sizes.

The product is used in a wide range of industries including railway and electrical / electronical devices.



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

E_EXPTCPVO 10/01/07

BentleyHarris®
Protection Products

Performance Data - Expando® TCP V0

Property	Test Method	Result
Working temperature		-50°C (-58°F) to +150°C (+302°F)
Fire / Smoke / Toxicity	UL 94 NF 16 101- 16 102 DIN 5510 §2 & 54837 UNI CEI 1170-3 Ed 2005 BS ASTM E 662 – ASTM E 162	Raw material classified V0 I2 F2 Zero halogen S4, SR2, ST2 T = 1,4 Pass
Fluid resistance: – Hydraulic fluids: NATO.0.156	EN 6059-303 Immersion for 24hrs at +70°C (+158°F)	No visible degradation or alteration after being exposed

Product Specifications

Longitudinal shrinkage should be taken into account when utilizing expansion properties of the sleeve.

Description	Recommended Application Range (mm) (in)		Standard Packaging (m) (ft)
	Min Ø	Max Ø	
Expando TCP V0 3	2 (5/64")	5 (13/64")	200 (656)
Expando TCP V0 4	3 (1/8")	7 (9/32")	200 (656)
Expando TCP V0 5	4 (5/32")	8 (5/16")	200 (656)
Expando TCP V0 6	5 (13/64")	9 (23/64")	200 (656)
Expando TCP V0 8	6 (1/4")	12 (15/32")	200 (656)
Expando TCP V0 10	7 (9/32")	15 (19/32")	100 (328)
Expando TCP V0 12	10 (25/64")	18 (45/64")	100 (328)
Expando TCP V0 15	12 (15/32")	23 (29/32")	50 (164)
Expando TCP V0 20	16 (5/8")	28 (1")	50 (164)
Expando TCP V0 25	21 (53/64")	35 (1-3/8")	50 (164)
Expando TCP V0 30	26 (1")	45 (1-3/4")	50 (164)
Expando TCP V0 40	36 (1-1/2")	60 (2-23/64")	50 (164)
Expando TCP V0 50	45 (1-3/4")	75 (3")	50 (164)

Part Numbering System:

Example:	Description	Size	Color	Quantity
	Expando TCP V0	4	0/8 (Black with a grey tracer)	200m (656ft)

Availability

Bentley-Harris® Expando TCP V0 is available in sizes 3 to 50 mm (1/8" to 2"). Standard colors: black with a grey tracer or grey with a black tracer.

Expando TCP V0 is supplied in spools. Packaging according to GALIA (ODETTE) standard.

All numeric data show average or typical value.

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2007 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products

Europe: (33) 3 44 30 39 00
China: (86) 21 5588 0898
Japan: (81) 45 938 8711
USA: (1) 800.926.2472

www.federal-mogul.com/sp

BentleyHarris®
Protection Products