

PMF



ACCESSORIES

Transparent tag holders 4 mm





for serieFLAT cable tags 4 mm

PMF holders are specifically designed to accommodate pairs of appropriately sized cables.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon.
Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)






	Cable ext. Ø range mm	Cable c.s.a range mm ²	Family	Length mm	Type	Quantity
	1,3 ÷ 2,2	0,25 ÷ 0,5	PMF-00	10	90000	8.000
				12	90010	7.000
				15	90020	6.000
				20	90040	4.000
				30	90070	2.000
				40	90090	2.500
	2 ÷ 3,7	0,5 ÷ 2,5	PMF-01	10	90100	6.000
				12	90110	5.000
				15	90120	4.000
				20	90140	3.000
				30	90170	2.000
				40	90190	1.000
				1.000	90180	25
	3,4 ÷ 4,3	2,5 ÷ 4	PMF-02	10	90200	4.000
				12	90210	4.000
				15	90220	3.000
				20	90240	2.000
				30	90270	1.000
				40	90290	1.000
	4 ÷ 6,3	4 ÷ 10	PMF-03	10	90300	3.000
				12	90310	2.000
				15	90320	2.000
				20	90340	1.000
				30	90370	1.000
				40	90390	1.000

PMF



plasticised
PVC **-40°C** **+80°C**

UL94
VO **RoHS**
 COMPLIANT
 2011/65/EU

	Cable ext.Ø range mm	Cable c.s.a range mm ²	Family	Length mm	Type	Quantity
	6 ÷ 10	10 ÷ 25	PMF-04	10	90400	2.000
				12	90410	1.000
				15	90420	1.000
				20	90440	500
				30	90470	500
				40	90490	500
	9 ÷ 15	25 ÷ 70	PMF-05	10	90500	500
				12	90510	500
				15	90520	250
				20	90540	250
				30	90570	150
				40	90590	100
	14 ÷ 26	70 ÷ 240	PMF-06	10	90600	500
				12	90610	250
				15	90620	250
				20	90640	100
				30	90670	100
				40	90690	100



cable tags, 4 mm MG-TPMF.....page 12
 cable tags, 4 mm TPM-ROLL.....page 58

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.

PMF-HF



ACCESSORIES

Transparent tag holders - Halogen Free

for serieFLAT cable tags 4 mm





PMF holders are specifically designed to accommodate pairs of appropriately sized cables.

Material: Copolymer EVA, self extinguishing to class HB: UL 94 Halogen Free

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

EVA **HF** **-40°C** **+80°C**

UL94
HB **RoHS**
COMPLIANT
2011/65/EU

	Cable ext.Ø range mm	Cable c.s.a range mm ²	Family	Length mm	Type	Quantity
	1,3 ÷ 2,2	0,25 ÷ 0,5	PMF-00-HF	10	90000-HF	8.000
				12	90010-HF	7.000
				15	90020-HF	6.000
				20	90040-HF	4.000
	2 ÷ 3,7	0,5 ÷ 2,5	PMF-01-HF	10	90100-HF	6.000
				12	90110-HF	5.000
				15	90120-HF	4.000
				20	90140-HF	3.000
				30	90170-HF	2.000
	3,4 ÷ 4,3	2,5 ÷ 4	PMF-02-HF	10	90200-HF	4.000
				12	90210-HF	4.000
				15	90220-HF	3.000
				20	90240-HF	2.000
	4 ÷ 6,3	4 ÷ 10	PMF-03-HF	30	90270-HF	1.000
				10	90300-HF	3.000
				12	90310-HF	2.000
				15	90320-HF	2.000
				23	90340-HF	1.000
				30	90370-HF	1.000

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.



cable tags, 4 mm MG-TPMF.....	page 12
cable tags, 4 mm TPM-ROLL.....	page 58

Transparent tag holders 4 mm

for cable tags 4 mm

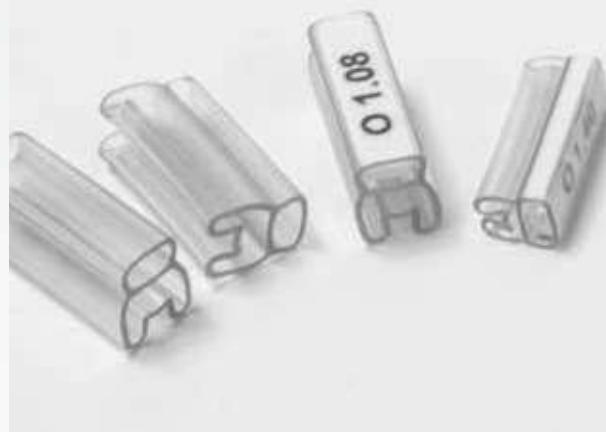
PM holders are profiled to allow each type to accommodate a range of cable sizes.



Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon.

Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

PM



	Cable ext. Ø range mm	Cable c.s.a range mm ²	Family	Length mm	Type	Quantity
	1,3 ÷ 2,2	0,25 ÷ 0,5	PM-00	10	50000	8.000
				10	50002	2.000
				12	50010	7.000
				12	50012	2.000
				15	50020	6.000
				15	50022	2.000
				18	50032	1.000
				21	50042	1.000
				23	50052	1.000
				27	50062	1.000
				30	50072	500
				1.000	50080	10
	2 ÷ 3,7	0,5 ÷ 2,5	PM-01	10	50100	6.000
				10	50102	2.000
				12	50110	5.000
				12	50112	1.000
				15	50120	4.000
				15	50122	1.000
				18	50130	3.000
				21	50140	3.000
				23	50150	2.000
				27	50160	2.000
				30	50170	1.000
				1.000	50180	10

PM




ACCESSORIES

Transparent tag holders 4 mm

for cable tags 4 mm

plasticised
PVC -40°C +80°C

UL94
VO
RoHS
COMPLIANT
2011/65/EU



Cable ext. Ø range mm	Cable c.s.a range mm ²	Family	Length mm	Type	Quantity
	3,4 ÷ 4,3	PM-02	10	50200	4.000
			10	50202	1.000
			12	50210	4.000
			12	50212	1.000
			15	50220	3.000
			15	50222	1.000
			18	50230	2.000
			21	50240	2.000
			23	50250	2.000
			27	50260	1.000
			30	50270	1.000
			1.000	50280	10
				4 ÷ 6,3	PM-03
10	50302	1.000			
12	50310	2.000			
12	50312	500			
15	50320	2.000			
15	50322	500			
18	50330	1.000			
21	50340	1.000			
23	50350	1.000			
27	50360	1.000			
30	50370	500			
1.000	50380	10			
	6 ÷ 10	PM-04			
			10	50402	500
			12	50410	1.000
			12	50411	500
			15	50420	1.000
			15	50421	500
			18	50430	1.000
			21	50440	500
			23	50450	500
			27	50460	500
			30	50470	500
			1.000	50480	10

PM



plasticised
PVC -40°C +80°C

UL94
VO RoHS
COMPLIANT
2011/65/EU

	Cable ext.Ø range mm	Cable c.s.a range mm ²	Family	Length mm	Type	Quantity
	9 ÷ 15	25 ÷ 70	PM-05	10	50500	500
				12	50510	500
				15	50521	250
				18	50530	250
				21	50540	250
				23	50550	250
				27	50560	250
				30	50570	250
				1.000	50580	10
	14 ÷ 26	70 ÷ 240	PM-06	10	50600	500
				12	50610	250
				15	50620	250
				18	50630	250
				21	50640	100
				23	50650	100
				27	50660	100
				30	50670	100
				1.000	50680	10

cable tags, 4 mm MG-TPM.....	page 13
markers PMP-30.....	page 86



It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.

PM-HF



ACCESSORIES

Transparent tag holders - Halogen Free

for cable tags 4 mm

PMF holders are specifically designed to accommodate pairs of appropriately sized cables.





Material: Copolymer EVA, self extinguishing to class HB: UL 94

Halogen Free

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

EVA **HF** **-40°C** **+80°C**

UL94
HB **RoHS**
COMPLIANT
2011/65/EU

	Cable ext. Ø range mm	Cable c.s.a range mm ²	Family	Length mm	Type	Quantity
	1,3 ÷ 2,2	0,25 ÷ 0,5	PM-00-HF	10	50002-HF	2.000
				12	50012-HF	2.000
				15	50022-HF	2.000
	2 ÷ 3,7	0,5 ÷ 2,5	PM-01-HF	10	50102-HF	2.000
				12	50112-HF	1.000
				15	50122-HF	1.000
	3,4 ÷ 4,3	2,5 ÷ 4	PM-02-HF	10	50202-HF	1.000
				12	50212-HF	1.000
				15	50222-HF	1.000
	4 ÷ 6,3	4 ÷ 10	PM-03-HF	10	50302-HF	1.000
				12	50312-HF	500
				15	50322-HF	500
				23	50350-HF	1.000
				30	50370-HF	500

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.



cable tags, 4 mm MG-TPM	page 13
markers PMP-30	page 86

Transparent tag holders - Light

for cable tags 4 mm



PM-L holders are thinner than PM versions and specifically designed to accommodate pairs of appropriately sized cables.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon. Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

PM-L



Cable ext. Ø range mm	Single cable c.s.a range mm ²	Double cable c.s.a range mm ²	Family	Length mm	Type	Quantity
 2,1 ÷ 3,5	0,5 ÷ 2,5	0,25 ÷ 0,75	PM-01L	10	10100	6.000
				12	10110	5.000
				15	10120	4.000
				18	10130	3.000
				21	10140	3.000
				23	10150	2.000
				27	10160	2.000
				30	10170	1.000
				40	10190	1.000
				1.000	10180	10
 2,6 ÷ 4,2	1 ÷ 4	0,5 ÷ 1	PM-02L	10	10200	4.000
				12	10210	4.000
				15	10220	3.000
				18	10230	2.000
				21	10240	2.000
				23	10250	2.000
				27	10260	1.000
				30	10270	1.000
				1.000	10280	10



cable tags, 4 mm MG-TPM page 13
 markers PMP-30 page 86

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.

PMF-AC



ACCESSORIES

Self adhesive transparent flat tag holders

for serie flat cable tags 4 mm


Self adhesive tag holders for surface mounting.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon. Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

plasticised
PVC -40°C +80°C

UL94 V0 **RoHS**
COMPLIANT
2011/65/EU

	Length mm	Type	Quantity
	10	66000N	5.000
	12	66010N	4.000
	15	66020N	4.000
	20	66040N	4.000
	30	66070N	2.000
	40	66090N	1.000

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.



flat cable tags, 4 mm MG-TPMF	page 12
flat cable tags, 4 mm TPM-ROLL	page 58

Transparent flat tag holders tie-on

for serie flat cable tags 4 mm

Tie on (tie width max 6 mm) for longitudinal mounting on cables, hoses, tubes and conduit.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon. Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

PMF-ET



	Length mm	Type	Tie: N° x width mm	Quantity
	15	63020	1 x 6 mm	2.000
	20	63040	1 x 6 mm	1.000
	30	63070	1 x 6 mm	1.000
	40	63090	2 x 6 mm	500

flat cable tags, 4 mm MG-TPMF page 12
 flat cable tags, 4 mm TPM-ROLL page 58
 cable ties page 128



It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.

PM-AC



ACCESSORIES

Self adhesive transparent tag holders

for cable tags 4 mm

Self adhesive tag holders for surface mounting.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon. Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

plasticised
PVC -40°C +80°C

UL94 V0 **RoHS**
COMPLIANT
2011/65/EU

Length mm	Type	Quantity
10	5100N	5.000
12	5101N	4.000
15	5102N	4.000
18	5103N	3.000
21	5104N	2.000
23	5105N	2.000
27	5106N	2.000
30	5107N	2.000
1.000	5108N	10



It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.



cable tags, 4 mm MG-TPM page 13

Transparent tag holders tie-on

for cable tags 4 mm

Tie on (tie width max 6 mm) for longitudinal mounting on cables, hoses, tubes and conduit.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon.

Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

PM-ET



plasticised
PVC -40°C +80°C

UL94 V0 **RoHS**
COMPLIANT
2011/65/EU

Length mm	Type	Tie: N° x width mm	Quantity
12	53010	1 x 6 mm	2.000
15	53020	1 x 6 mm	2.000
18	53030	1 x 6 mm	1.000
21	53040	1 x 6 mm	1.000
23	53050	1 x 6 mm	1.000
27	53060	1 x 6 mm	1.000
30	53070	1 x 6 mm	1.000
40	53090	2 x 6 mm	500



cable tags, 4 mm MG-TPM page 13
cable ties page 128

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.

PM-DT



ACCESSORIES

Transparent tag holders tie-on

for cable tags 4 mm


Tie on (tie width max 6 mm) for longitudinal mounting on cables, hoses, tubes and conduit.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon. Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

plasticised
PVC -40°C +80°C

UL94 V0
RoHS
COMPLIANT
2011/65/EU

	Length mm	Type	Max width cable tie mm	Quantity
	10	55000	4,8	7.000
	12	55010		6.000
	15	55020		5.000
	18	55030		3.000
	21	55040		3.000
	23	55050		3.000
	27	55060		2.000
	30	55070		2.000
	1000	55080		10

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.



cable tags, 4 mm MG-TPM page 13
cable ties page 128

Self adhesive transparent legend holders 9 & 15 mm



for cable tags 9 & 15 mm

Self adhesive for surface mounting of 9 & 15 mm legends.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon. Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)



	Length mm	Type	For tags mm	Quantity
	20	59042N	9	500
	35	59050N	9	500
	1.000	59070N	9	10
	17	59002N	15	500
	27	59010N	15	1.000
	49	59020N	15	500
	67	59030N	15	250
	1.000	59060N	15	10

cable tags, 15 mm MG-TAP.....	page 26
cable tags, 9 mm MG-TAPW.....	page 28



It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.

PMT-ET



ACCESSORIES

Transparent legend holders tie-on 9 & 15 mm

for cable tags 9 & 15 mm







Tie on (tie width max 6 mm) for longitudinal mounting on cables, hoses, tubes and conduit.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon. Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

plasticised
PVC -40°C +80°C

UL94 V0 **RoHS**
COMPLIANT
2011/65/EU


	Family	Length mm	Type	For tags mm	Tie: N° x width mm	Quantity
	PMT-ET	20	54040	9 x 20	1 x 6 mm	1.000
		35	54050	9 x 35	2 x 6 mm	500
		17	54000	15 x 17	1 x 6 mm	500
		27	54010	15 x 27	1 x 6 mm	500
		49	54020	15 x 49	2 x 6 mm	250
		67	54030	15 x 67	2 x 6 mm	250

PMT-CT

Transparent legend holders tie-on 9 mm

for cable tags 9 mm



	Family	Length mm	Type	For tags mm	Tie: N° x width mm	Quantity
	PMT-CT	40	54015	9	2 x 4,8 mm	500
		55	54013	9	2 x 4,8 mm	500
		90	54014	9	2 x 4,8 mm	250

It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.



cable tags, 15 mm MG-TAP.....	page 26
cable tags, 9 mm MG-TAPW.....	page 28
cable ties.....	page 128

Transparent legend holders tie-on 9 & 15 mm

for cable tags 9 & 15 mm

Tie on for longitudinal mounting on cables, hoses, tubes and conduit.

Material: plasticised PVC, self extinguishing to class V0: UL 94, free of Cadmium, Lead, Silicon and Teflon. Resistant to Alkali, Alcohol, Acid and many Solvents.

Operating temperature range: -40°C (-40°F) to +80°C (+176°F)

PMT-DT



	Length mm	Type	For tags mm	Max width cable tie mm	Quantity
	20	60042			500
	35	60050	9	9	1,000
	1.000	60070			10
	17	60002			500
	27	60012			500
	49	60020	15	12,6	250
	67	60030			500
	1.000	60060			10

cable tags, 15 mm MG-TAP..... page 26
 cable tags, 9 mm MG-TAPW..... page 28
 cable ties..... page 128



It is advisable to select the holder size based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

Consult us for holders in other lengths.

Use holders only with designated cable tags of the same length.