


Part number

PEW 3265 PV



Mobile socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 32 A, 380 ÷ 415 V

Product description

Product type	Socket Mobile
Series	PEW...PV, PLUSO
Connection type	Screw terminal connection
N. of poles	3 poles + N + 
Clock position	6

Technical data

Current	32 A
Voltage	380 ÷ 415 V
IP degree of protection	IP67

Further technical details

Weight	320,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747075602
-------------------	---------------

Packaging Information

Packaging length	275,00 mm
Packaging height	230,00 mm
Packaging width	275,00 mm
Packaging weight	3,68 kg
Packaging volume	17,39 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747075619


Part number

PEW 3265 PV



Catalogue drawings

(16 / 32A) PEW ... PV

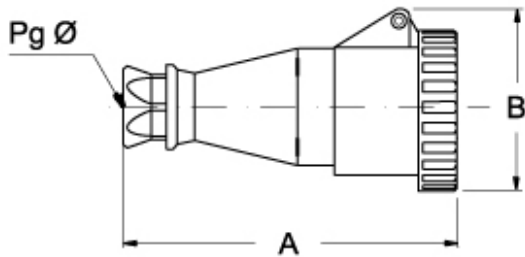

PEW ... PV	A	B	Pg Ø	
16A 2P+⊖	153	77	16	
	3P+⊖	158	85	16
	3P+N+⊖	166	93	21
32A 2P+⊖	183	98	21	
	3P+⊖	183	98	21
	3P+N+⊖	188	105	21

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...PV)