

PERFECT CRIMPED CONNECTIONS FOR SURE.

Klauke crimping tools give you peace of mind for optimum processing. The right crimping tool achieves connections that satisfy even the toughest requirements.





SO FAST IN SERIES PRODUCTION - THE KLAUKE MICRO

The Klauke Micro is as convenient and quick as a mechanical tool, and just as powerful and easy to handle as a battery-powered hydraulic tool. Compact and portable in one device! Thanks to the innovative PowerSense technology. This tool simplifies your work like never before.



Klauke *micro*

► Manual pre-clamping - motorized crimping

- Flexible to use with interchangeable crimping dies
- Broad application range of up to 50 mm²
- With LED illumination of the crimp position and the work area
- Low weight (< 1 kg)
- Intuitive operation thanks to PowerSense function
- Electronic control with ratchet function and motor stall protection
- Automatic retraction
- Long service life with servicing intervals of 35,000 cycles
- 3 year warranty on tool registration

Link to tool registration:

www.klauke.com/en/werkzeugregistrierung/login-tool-registration/





Crimping

Electro mechanical crimping tool

EK 50 ML Electromechanical crimping tool 0.14 - 50 mm²



- ▶ The Klauke micro with intuitive PowerSense function combines the benefits of manual crimping tools with the convenience of battery powered hydraulic crimping tools
- ▶ Excellent crimps with minimum effort

Characteristics

- Simple and safe: One-button operating concept for controlling all tool functions
- Electronic control with locking function monitors full closing of the dies
- Simple and safe: Automatic retraction when operation is complete
- Manual retract as required
- Motor stall protection
- Ergonomic 2C housing in the Klauke "In-line Design"
- Tool fixing point for use with balancer aid or lanyard
- Very low weight and high speed for maximum efficiency
- Powerful drive technology for effortless operations
- Powerful 10.8 V Li-Ion battery with charge status display
- LED for work area illumination
- Maintenance display via LED
- Project-based reporting with Klauke i-press® software package

Suitable for























- 50-series interchangeable dies

Technical data	
Crimping force	max. 15 kN
Crimping range	0.14 - 50 mm ²
Number of crimps	approx. 300 at 10 mm ² Cu DIN 46234 / per battery charge
Battery voltage	10.8 V
Battery capacity	1.5 Ah, Li-Ion
Charging time	approx. 40 min.
Weight incl. battery	0.96 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No.	
Electromechanical crimping tool 0.14 - 50 mm ²	EK50ML	
Scope of supply	Part No.	Page
Battery 10.8 V / 1.5 Ah, Li-Ion (16.2 Wh)	RAML1	485
Charger for 10.8 V Li-Ion batteries, 230V	LGML1	487
Crimping dies IS 50, double crimping, 0.5 - 6 mm ²	IS501	
Plastic case 450 x 370 x 105 mm	KKEK50ML	
Variants	Part No.	Page
Electromechanical crimping tool 0.14 - 50 mm ² with RAML1 battery, no crimping die, case, charge	EK50ML-L	
L-BOXX with electro-mechanical crimping tool EK 50 ML 0.14 to 50 mm ² and extensive additional equipment	LBOXXEK50ML	198



Available dies of series 50 for EK 50 ML

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs, Cu, standard type		0.75 - 10		312
Tubular cable lugs and connectors, Cu, standard type		6 - 25		312
Tubular cable lugs and connectors for solid conductors, Cu		1.5 - 10		312
Compression cable lugs and connectors acc. to DIN - Cu				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1)		6 - 25		312
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		0.5 - 10		312
Insulated solderless terminals and connectors		10 - 16		313
Cable end-sleeves				
Cable end-sleeves		0.14 - 50		312
Cable connections, insulated and non-insulated				
Insulated cable connections, single crimping		0.5 - 16		313
Insulated cable connections, double crimping		0.1 - 6		313
Non insulated receptacles		0.25 - 6		313
for pin and shielded receptacles, BNC connectors for coax cables RG 58, 59, 60 and 71				313
Turned pin connectors, pin receptacles		0.1 - 4		313

THINK OF YOUR HEALTH!

Frequent manual crimping eventually leads to over-strain in the wrist and lower arm. To crimp with the EK 50 ML, you only need around 10% of the manual force required by a mechanical hand tool. Motorised crimping with the EK50ML is an investment that pays off!





Crimping

Battery powered hydraulic crimping tools 10,8 V

THE LITTLE CRIMPING EXPERT - BATTERY-POWERED HYDRAULIC CRIMPING TOOL (10.8 V)

We have made performance easy: The Klauke mini is light-weight yet powerful. The Klauke mini's practical dimensions make it the ideal solution for confined areas, in panel building for instance. A convenient expert for crimp to 150 mm² nominal cross-section.

Klauke mini

► Pure performance without frills

The Klauke mini concentrates on its core task: reliable crimping. Even without pressure sensor and display, the little expert does its job well - no fuss or quibble.

► Usage time at a glance

Read the charge level at any time from the powerful 10.8 V battery.

► All-round crimping

How can confined areas be easily reached? With crimping heads rotating through 360°.



EK 30 ID ML Battery powered hydraulic crimping tool 6 - 120 mm²



- ▶ Powerful 10.8 V Li-Ion battery technology with battery charge indicator
- ▶ Indent crimping - no change of crimping dies required

Characteristics

- Closed head, flip top style, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Comfortable and secure one-hand operation thanks to 2-component plastic housing with soft lining
- Effortless working thanks to low weight
- Automatic retraction when operation is complete
- Maintenance display via LED

Suitable for

- Very well suited for compacted conductors
- Especially for fine strand conductors to DIN EN 60228

Technical data			
Crimping force	30 kN		
Stroke / opening width	22 mm		
Crimping range	6 - 120 mm ²		
Crimping cycle	2,5 s up to 5 s (depending on crimp cross-section)		
Charging time	40 min.		
Weight incl. battery	1.95 kg		
Ambient temperature	-10 °C up to +40 °C		
Item	Part No.		
Battery powered hydraulic crimping tool 6 - 120 mm ²	EK30IDML		
Scope of supply			
Battery 10.8 V / 1.5 Ah, Li-Ion (16.2 Wh)	RAML1		
Charger for 10.8 V Li-Ion batteries, 230V	LGML1		
Plastic case	KKML		
Suitable for	Connection material	Crimping range mm ²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 120	
Tubular cable lugs and connectors for fine stranded conductors		6 - 120	
Terminals, connectors and pin terminals acc. to DIN, copper			
Solderless terminals (DIN 46234), connectors (DIN 46341) and pin terminals (DIN 46230)		6 - 95	



Crimping

Battery powered hydraulic crimping tools

EK 15/50 ML Battery powered hydraulic crimping tool 0.14 - 50 mm²



- ▶ Long service life thanks to robust head
- ▶ Optimum crimping due to parallel guided crimping dies
- ▶ Effortless operations thanks to low weight
- ▶ Powerful 10.8 V Li-Ion battery technology with battery charge indicator

Characteristics

- Open head, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Comfortable and secure one-hand operation thanks to 2-component plastic housing with soft lining
- Simple and safe: Automatic retraction when operation is complete
- Maintenance display via LED

Suitable for























- 50-series interchangeable dies

Technical data

Crimping force	13 kN
Stroke / opening width	9 mm
Crimping range	0.14 - 50 mm ²
Crimping cycle	approx. 2 s
Number of crimps	approx. 230 at 10 mm ² Cu
Battery voltage	10.8 V
Battery capacity	1.5 Ah, Li-Ion
Charging time	approx. 40 min.
Weight incl. battery	1.5 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No.	
Battery powered hydraulic crimping tool 0.14 - 50 mm ²	EK1550ML	
Scope of supply	Part No.	Page
Battery 10.8 V / 1.5 Ah, Li-Ion (16.2 Wh)	RAML1	485
Charger for 10.8 V Li-Ion batteries, 230V	LGML1	487
Plastic case	KKML	

Available dies for Series 50 for EK 15/50 ML

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type		0.75 - 10		312
Tubular cable lugs, Cu, standard type		6 - 25		312
Tubular cable lugs and connectors for solid conductors, Cu		1.5 - 10		312
Compression cable lugs and connectors acc. to DIN - Cu				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1)		6 - 25		312
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		0.5 - 10		312
Insulated solderless terminals and connectors		10 - 16		313
Cable end-sleeves				
Cable end-sleeves		0.14 - 50		312
Cable connections, insulated and non-insulated				
Insulated cable connections, single crimping		0.5 - 16		313
Insulated cable connections, double crimping		0.1 - 6		313
Non insulated receptacles		0.25 - 6		313
for pin and shielded receptacles, BNC connectors for coax cables RG 58, 59, 60 and 71				313
Turned pin connectors, pin receptacles		0.1 - 4		313



Crimping

Battery powered hydraulic crimping tools

EK 35/4 ML Battery powered hydraulic crimping tool 6 - 150 mm²



- ▶ Large cross section range up to 150 mm²
- ▶ Slim crimping head - ideal when space is critical
- ▶ Powerful 10.8 V Li-Ion battery technology with battery charge indicator

Characteristics







































- Closed head, flip top style, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Comfortable and secure one-hand operation thanks to 2-component plastic housing with soft grips
- Effortless working thanks to low weight
- Simple and safe: Automatic retraction when operation is complete
- Maintenance display via LED

Suitable for

- 4-series interchangeable dies, narrow crimping

Technical data		
Crimping force	35 kN	
Stroke / opening width	9 mm	
Crimping range	6 - 150 mm ²	
Crimping cycle	3 s to 4 s (depending on crimp cross-section)	
Number of crimps	approx. 145 at 120 mm ² Cu	
Battery voltage	10.8 V	
Battery capacity	1.5 Ah, Li-Ion	
Charging time	approx. 40 min.	
Weight incl. battery	1.6 kg	
Ambient temperature	-10 °C up to +40 °C	
Item	Part No.	
Battery powered hydraulic crimping tool 6 - 150 mm ²	EK354ML	
Scope of supply	Part No.	Page
Battery 10.8 V / 1.5 Ah, Li-Ion (16.2 Wh)	RAML1	485
Charger for 10.8 V Li-Ion batteries, 230 V	LGML1	487
Plastic case	KKML	
Variants	Part No.	Page
EK 35/4 ML with crimping die set HR 4 from 6 - 150 mm ²	EK354MLSETHR	
EK 35/4 ML with crimping die set HD 4 from 6 - 120 mm ²	EK354MLSETHD	

Available dies for Series 4 for EK 35/4 ML

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 150		314
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 150		314
Insulated cable lugs and compression joints, standard type, insulated pin terminals		10 - 70		314
Tubular cable lugs and connectors for fine stranded conductors		10 - 35		315
Tubular cable lugs and connectors for solid conductors		1.5 - 16		315
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		0.5 - 2.5		315
Stainless steel tubular cable lugs and connectors		4 - 16		315
Nickel tubular cable lugs and connectors		0.5 - 2.5		315
Nickel tubular cable lugs and connectors		4 - 16		315
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 120		316
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		6 - 35		316
Insulated solderless terminals and connectors		10 - 16		316
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 150 se / 120 sm		317
Aluminium compression cable lugs and connectors acc. to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 70 rm/se, 16 - 95 re/se		317
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies HA4, copper side of aluminum/copper compression cable lugs and connectors: crimping dies HD4		10 - 70 rm/se, 16 - 95 re/se		317
Clamps				
Clamps, C-type		4 - 35		317
Cable end-sleeves				
Cable end-sleeves		10 - 50		317
Twin cable end-sleeves		2 x 4 - 2 x 16		318
Twin cable end-sleeves for fine stranded conductors		2 x 4 - 2 x 16		318



Crimping

Battery powered hydraulic crimping tools 18 V

THE NEW STANDARD - KLAUKE NEXT GENERATION CRIMPING TOOLS

To guarantee the quality, you can check the tool data from the display or via i-press® app at any time. You can easily make this information available to your customers as project documentation at the touch of a button. The balanced design ensures effortless and continuously high-quality operations up to the end of each working day.

**NEXT
GENERATION**



In brief

- ▶ Selectable battery platform: with Bosch or Makita
- ▶ Proof of quality can be created via Bluetooth
- ▶ Ensure tool availability: Read the tool properties from the display or via the app
- ▶ Effortless operations thanks to modern, ergonomic design

Interested in Klauke Next Generation tools? Then take a look at our Multi universal tool on [Page 467 >>](#)

► Making work easier

Klauke tools guarantee effortless operations: The “mini” impresses through its low weight and the pistol shape thanks to the balanced centre of gravity

- Our compact “mini” is just perfect for confined areas
- The 2-stage hydraulic system ensures fast operations with fast feed and power stroke (pistol shape)
- Especially impressive and reliable: The one-button control concept for all tools with automatic retraction

- The ARS function (Automatic Retraction Stop) stops the automatic retraction when a crimp is complete through a fully-automated process

► Guarantees quality

- All relevant tool data immediately in view on the integrated display
- In case of a fault, you are warned by a visual and audible signal from the tool

- Provide written proof of the quality of your work with i-press® - now simply and conveniently connect the tool to the computer via Bluetooth.



► i-press® software

Show your customers how well you work. Klauke Next Generation records your operations, and these can then be transmitted by Bluetooth. The free i-press® software uses these data to create for you, if you want, a project report - the proof of quality for your correct operations. You have control over your quality.

► i-press® app

Use the i-press® app to check and control your tool data on the go. Individual tool settings, such as the number of warning tones for an incorrect crimp or the double-click function for increased user safety, help make your day-to-day work simpler and more reliable - just as you need it.



The i-press® app can be found at:
www.klauke.com/en/service/downloads/connectivity-software/





Crimping

Battery powered hydraulic crimping tools

THE I-PRESS® APP AT A GLANCE

Compact and available at all times: Your smart-phone becomes the tool's nerve centre, simplifying your daily work routine – free-of-charge, guaranteed.



Made easy: Your Next Generation tool connects to the i-press® app via Bluetooth - you can now use the comprehensive range of functions.

Read the important tool information from the display and start new projects. All the information about your crimping operations is saved from now on. When the project is complete, an overview can be printed out, saved or submitted in the form of a report.

TIP: When you register as a user, subscribe to the Klauke Newsletter – that way, you will always be up-to-date.

i-press® app

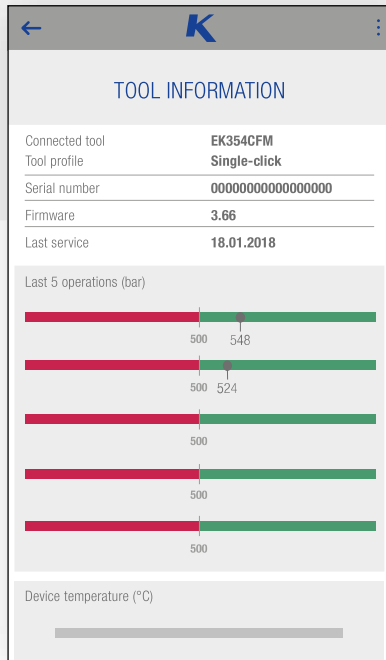


Keep an overview of all your tools even while on the go. and personalise your tool settings via the app.

For all variants

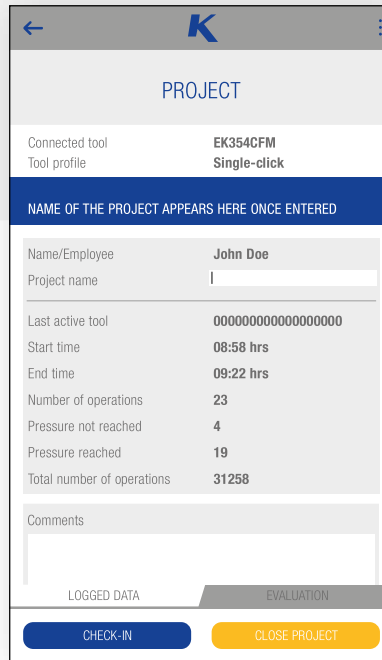
EASY TO OPERATE

Menu guidance function is easy and quick to understand thanks to the cascade function. You can start immediately, personalise your tool and use all the other functions.



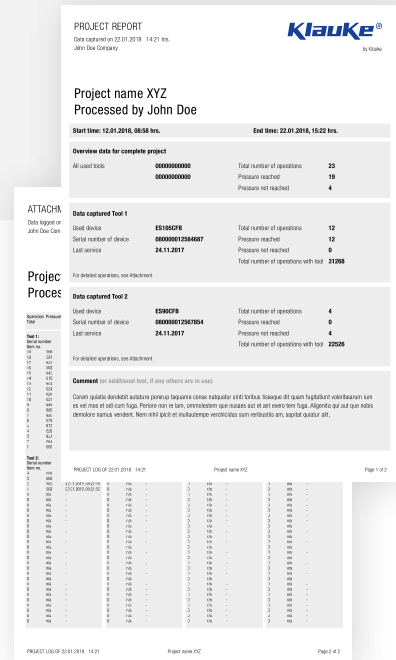
CREATING AND TRACKING PROJECTS

The last 5 pressure values, the device temperature or the remaining operations – all important information can be easily read off.



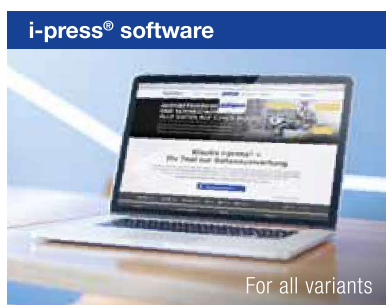
DOCUMENTING AND ARCHIVING

When a project is closed, an overview containing all the pressure values is generated. You can use this as documentary proof and for archiving purposes.



Make the most of it – make your day-to-day operations more effective, more ergonomic and more innovative

- Get an overview of your tool data
- Plan your maintenance schedule
- Minimise your downtimes
- Increase availability and service life with regular maintenance and inspections
- Helps you organise your work
- Create projects based on installation and building plans
- Document and archive every single crimp in one report
- Proof of your daily activities



Reads out all tool data, so you can check the tool status. i-press® also gives you proof of quality assessment in the form of a project report. i-press® is a Desktop application which you can download free-of-charge from the Klauke website.

The new software can be found at www.klauke.com/de/support/download/connectivity-werkzeugdaten-auslesen/



Crimping

Battery powered hydraulic crimping tools

EK 35/4 Battery powered hydraulic crimping tool 6 - 150 mm²

**NEXT
GENERATION**



- ▶ Large cross section range up to 150 mm²
- ▶ Slim crimping head - ideal when space is critical
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Simple and safe: Automatic retraction when operation is complete
- Effortless working thanks to low weight
- LED for work area illumination
- Always ready-to-use thanks to battery charge and service display







































Suitable for

- 4-series interchangeable dies, narrow crimping



Technical data		
Crimping force	35 kN	
Stroke / opening width	9 mm	
Crimping range	6 - 150 mm ²	
Crimping cycle	3 s to 4 s (depending on crimp cross-section)	
Charging time	15 min.	
Weight incl. battery	2.4 kg	
Ambient temperature	-10 °C up to +40 °C	
Item	Part No. Bosch	Part No. Makita
Battery powered hydraulic crimping tool 6 - 150 mm ²	EK354CFB	EK354CFM
Scope of supply		Page
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU	484
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU	486
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1 483
Makita quick-charger for 18 V Li-Ion battery		LGL1 486
Plastic case	KK50NG	KK50NG
Accessories		Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU	485
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		RAL2 483
Variants		Page
L-BOXX with battery powered crimping tool EK354CFB, 6 - 150 mm ²	LBOXXEK354CFB	203
L-BOXX with battery powered crimping tool EK354CFM, 6 - 150 mm ²		LBOXXEK354CFM 203

Available dies for Series 4 for EK 35/4

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 150		314
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 150		314
Insulated cable lugs and compression joints, standard type, insulated pin terminals		10 - 70		314
Tubular cable lugs and connectors for fine stranded conductors		10 - 35		315
Tubular cable lugs and connectors for solid conductors		1.5 - 16		315
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		0.5 - 2.5		315
Stainless steel tubular cable lugs and connectors		4 - 16		315
Nickel tubular cable lugs and connectors		0.5 - 2.5		315
Nickel tubular cable lugs and connectors		4 - 16		315
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 120		316
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		6 - 35		316
Insulated solderless terminals and connectors		10 - 16		316
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 150 se / 120 sm		317
Aluminium compression cable lugs and connectors acc. to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 70 rm/se, 16 - 95 re/se		317
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies HA4, copper side of aluminum/copper compression cable lugs and connectors: crimping dies HD4		10 - 70 rm/se, 16 - 95 re/se		317
Clamps				
Clamps, C-type		4 - 35		317
Cable end-sleeves				
Cable end-sleeves		10 - 50		317
Twin cable end-sleeves		2 x 4 - 2 x 16		318
Twin cable end-sleeves for fine stranded conductors		2 x 4 - 2 x 16		318



Crimping

Battery powered hydraulic crimping tools

EK 50/5 Battery powered hydraulic crimping tool 6 - 240 mm²

**NEXT
GENERATION**



**K5
SERIE**

- ▶ Very large crimping range to 240 mm² (tubular cable lugs only)
- ▶ All tool data in view thanks to display and i-press® app

Characteristics



























- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working thanks to low weight
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 5-series interchangeable dies, narrow crimping

Technical data			
Crimping force	50 kN		
Stroke / opening width	12 mm		
Crimping range	6 - 240 mm ²		
Crimping cycle	4 s to 5 s (depending on crimp cross-section)		
Charging time	15 min.		
Weight incl. battery	2.4 kg		
Ambient temperature	-10 °C up to +40 °C		
Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 6 - 240 mm ²	EK505CFB	EK505CFM	
Scope of supply			Page
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU		484
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1	483
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK50NG	KK50NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		RAL2	483
Variants			Page
L-BOXX with battery powered crimping tool EK505CFB, 6-240 mm ²	LBOXXEK505CFB		203
L-BOXX with battery powered crimping tool EK505CFM, 6-240 mm ²		LBOXXEK505CFM	203

Available dies for Series 5 for EK 50/5

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 185		319
Tubular cable lugs and connectors, Cu, standard type		6 - 240		319
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 95		319
Tubular cable lugs and connectors for fine stranded conductors		10 - 50		320
Compression cable lugs and connectors acc. to DIN - Cu				
Cooper compression cable lugs (DIN 46235) and connectors (DIN 46267), part 1) Cu		6 - 185		320
Terminals, connectors and pin terminals acc. to DIN - Cu				
Solderless terminals (DIN 46234) and pin terminals (DIN 46230)		10 - 50		320
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 300 se / 240 sm		321
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10-150 rm/sm, 16-185 re/se		321
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182		25 - 95		321
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10-150 rm/sm, 16-185 re/se		321
Clamps				
Clamps, C-type		16 - 35		321
Cable end-sleeves				
Cable end-sleeves		10 - 95		322
Twin cable end-sleeves		2 x 4 - 2 x 16		322



Crimping

Battery powered hydraulic crimping tools

EK 50/18 Battery powered hydraulic crimping tool 6 - 240 mm²

**NEXT
GENERATION**



- ▶ For dies acc. to DIN 48083, sheet 1
- ▶ Fast crimp cycles due to Automatic Retraction Stop (ARS)
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- All data can be easily read via Bluetooth
- Choose your battery system: Bosch or Makita
- Open head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working thanks to low weight
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for





































- 18-series interchangeable dies, narrow crimping



Technical data		
Crimping force	50 kN	
Stroke / opening width	17 mm	
Crimping range	6 - 240 mm ²	
Crimping cycle	5 s to 6 s (depending on cross-section)	
Charging time	15 min.	
Weight incl. battery	2.8 kg	
Ambient temperature	-10 °C up to +40 °C	
Item	Part No. Bosch	Part No. Makita
Battery powered hydraulic crimping tool 6 - 240 mm ²	EK5018CFB	EK5018CFM
Scope of supply		Page
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU	484
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU	486
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1 483
Makita quick-charger for 18 V Li-Ion battery		LGL1 486
Plastic case	KK50NG	KK50NG
Accessories		Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU	485
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		RAL2 483
Variants		Page
L-BOXX with battery powered crimping tool EK5018CFB, 6 - 240 mm ²	LBOXXEK5018CFB	203
L-BOXX with battery powered crimping tool EK5018CFM, 6 -240 mm ²		LBOXXEK5018CFM 203

Available dies for Series 18 for EK 50/18

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs, standard type, tubular cable lugs for switch-gear connections		6 - 240		323
Connectors, standard type		6 - 95		323
Insulated tubular cable lugs and connectors, standard type, insulated pin terminals		10 - 95		323
Tubular cable lugs and connectors for fine stranded conductors		10 - 50		323
Tubular cable lugs and connectors for solid conductors		1.5 - 16		324
Copper compression cable lugs and connectors to DIN				
Compression cable lugs (DIN 46235)		6 - 185		324
Connectors DIN 46267		6 - 70		324
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		10 - 70		324
Insulated solderless terminals and connectors		10 - 50		324
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 240 sm		325
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10-185 rm/sm, 16 - 240 re/se		325
Aluminium connectors		6 - 70		325
Compression joints for full-tension connections of Aldrey-conductors DIN EN 50182		25 - 95		325
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D		10-185 rm/sm, 16 - 240 re/se		325
Clamps				
Clamps, C-type		4 - 50		325
Cable end-sleeves				
Cable end-sleeves		10 - 95		326
Twin cable end-sleeves		2 x 4 - 2 x 16		326
Twin cable end-sleeves, trapezoidal, for fine stranded conductors		2 x 4 - 2 x 16		326
Cutting die				
for cutting area		18 mm dia.		392



Crimping

Battery powered hydraulic crimping tools

EKM 60/22 Battery powered hydraulic crimping tool 6 - 300 mm²

**NEXT
GENERATION**



- ▶ Large crimping range up to 300 mm²
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 22-series interchangeable dies, narrow crimping















































**K22
SERIE**

Technical data			
Crimping force	60 kN		
Hub	17.5 mm		
Crimping range	6 - 300 mm ²		
Crimping cycle	2 s (bei ARS) und 5 s (depending on crimp cross-section)		
Charging time	15 min.		
Weight incl. battery	3.0 kg		
Ambient temperature	-10 °C up to +40 °C		
Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 6 - 300 mm ²	EKM6022CFB	EKM6022CFM	
Scope of supply			Page
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU		484
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Plastic case	KK50NG		
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1	483
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case		KK50L	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Variants			Page
L-BOXX with battery powered crimping tool EKM6022CFB, 6 - 300 mm ²	LBOXXEKM6022CFB		203
L-BOXX with battery powered crimping tool EKM6022CFM, 6 - 300 mm ²		LBOXXEKM6022CFM	203

Available dies for Series 22 for EKM 60/22

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, blue connection® for compacted conductors acc. to DIN EN 60228 Class 2		6 - 300		328
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 300		327
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 150		327
Tubular cable lugs and connectors for fine stranded conductors		10 - 70		328
Tubular cable lugs and connectors for solid conductors		1.5 - 16		328
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		10 - 50		328
Nickel tubular cable lugs and connectors		10 - 50		328
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 300		329
Double compression cable lugs		2 x 50 - 2 x 70		329
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		10 - 70		329
Insulated solderless terminals		10 - 70		329
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 300 sm		330
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 300		330
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm ²		25 - 185		330
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		331
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		331
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A22, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D22		10 - 300		330
Clamps				
Clamps, C-type		4 - 70		331
Clamps, H-type		70		331
Cable end-sleeves				
Twin cable end-sleeves		2 x 4 - 2 x 16		332
Cable end-sleeves, trapezoidal, for fine stranded conductors		10 - 240		332
Twin cable end-sleeves, trapezoidal, for fine stranded conductors		2 x 4 - 2 x 16		332



Crimping

Battery powered hydraulic crimping tools

EK 60/22 Battery powered hydraulic crimping tool 6 - 300 mm²

**NEXT
GENERATION**



- ▶ Large crimping range up to 300 mm²
- ▶ Fast crimp cycles due to Automatic Retraction Stop (ARS)
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for













































- 22-series interchangeable dies, narrow crimping



Technical data			
Crimping force	60 kN		
Hub	17 mm		
Crimping range	6 - 300 mm ²		
Crimping cycle	3 s to 5 s (depending on crimp cross-section)		
Charging time	45 min.		
Weight incl. battery	4.4 kg		
Ambient temperature	-10 °C up to +40 °C		
Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 6 - 300 mm ²	EK6022CFB	EK6022CFM	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Item		Part No.	Page
EK 60/22 with crimping die set D 22 from 16 - 240 mm ²		EK6022CFMSETD	
EK 60/22 with crimping die set R 22 from 16 - 240 mm ²		EK6022CFMSETR	

Available dies for Series 22 for EK 60/22

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, blue connection® for compacted conductors acc. to DIN EN 60228 Class 2		6 - 300		328
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 300		327
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 150		327
Tubular cable lugs and connectors for fine stranded conductors		10 - 70		328
Tubular cable lugs and connectors for solid conductors		1.5 - 16		328
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		10 - 50		328
Nickel tubular cable lugs and connectors		10 - 50		328
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 300		329
Double compression cable lugs		2 x 50 - 2 x 70		329
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		10 - 70		329
Insulated solderless terminals		10 - 70		329
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 300 sm		330
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 300		330
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm ²		25 - 185		330
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		331
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		331
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A22, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D22		10 - 300		330
Clamps				
Clamps, C-type		4 - 70		331
Clamps, H-type		70		331
Cable end-sleeves				
Twin cable end-sleeves		2 x 4 - 2 x 16		332
Cable end-sleeves, trapezoidal, for fine stranded conductors		10 - 240		332
Twin cable end-sleeves, trapezoidal, for fine stranded conductors		2 x 4 - 2 x 16		332



Crimping

Battery powered hydraulic crimping tools

EK 60 VP Battery powered hydraulic crimping tool 10 - 240 mm²

**NEXT
GENERATION**



- ▶ Crimps optimised at all times due to the patented centring system
- ▶ Fast crimp cycles due to Automatic Retraction Stop (ARS)
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Quad-point indent crimping feature with patented centring system, no dies required
- Open head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Always ready-to-use thanks to battery charge and service display

Technical data

Crimping force	55 kN
Crimping range	10 - 240 mm ²
Crimping cycle	3 s to 6 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	5.0 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 10 - 240 mm ²	EK60VPCFB	EK60VPCFM	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK120NG	KK120NG	
Accessories			Page
Gauge and 10 Test cylinder	TS10B	TS10B	

Suitable for	Connection material	Crimping range mm ²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs, standard type, tubular cable lugs for switchgear connections		10-240	
Connectors, standard type		10-120	
Tubular cable lugs for fine stranded conductors		10-240	
Connectors for fine stranded conductors		10-95	

EK 60 VP/FT Battery powered hydraulic crimping tool 16 - 300 mm²

**NEXT
GENERATION**



- ▶ Suitable for crimping tubular cable lugs and connectors „standard type“ and fine and superfine stranded conductors to 300 mm²
- ▶ Fast crimp cycles due to Automatic Retraction Stop (ARS)
- ▶ All tool data in view thanks to display and i-press® app





Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Quad-point indent crimping feature with patented centring system, no dies required
- Closed head with bolt interlock, rotatable, flip top style
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Technical data

Crimping force	55 kN
Crimping range	16 - 300 mm ²
Crimping cycle	3 s to 6 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	5.1 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 16 - 300 mm ²	EK60VPFTCFB	EK60VPFTCFM	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484

Suitable for	Connection material	Crimping range mm ²	Crimp profile
Tubular cable lugs and connectors - Cu			
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		16-300	
Tubular cable lugs and connectors for fine stranded conductors		16-300	



Crimping

Battery powered hydraulic crimping tools

EKM 60 ID Battery powered hydraulic crimping tool 10 - 240 mm²

**NEXT
GENERATION**



- ▶ Extra large crimping area due to innovative 2-stage telescopic cylinder
- ▶ Indent crimping - no changing of dies required
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- With innovative 2-stage telescopic cylinder
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Always ready-to-use thanks to battery charge and service display

Suitable for

- Very well suited for compacted conductors
- Especially for fine strand conductors to DIN VDE 60228
- Certified from 16 mm² onwards



Suitable for	Connection material	Crimping range mm ²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs and connectors, standard type, Tubular cable lugs for switch gear connections		10 - 240	
Tubular cable lugs and connectors for fine stranded conductors		10 - 240	
Terminals, connectors and pin terminals acc. to DIN			
Solderless terminals (DIN 46234) connectors and pin terminals (DIN 46230, DIN 46341)		10 - 240	
Aluminum compression cable lugs and connectors			
Aluminum compression cable lugs and connectors acc. to DIN		50 - 240	
Compression joints for full tension connections of Aldrey conductors according to DIN EN 50182		50 - 185	
Compression joints acc. to DIN 48085, part 3 for Al/St-cable acc. to DIN EN 50182		50 - 240	
Aluminum/copper compression cable lugs and connectors			
Aluminum/copper compression cable lugs and connectors		50 - 240	

Technical data		
Crimping force	30 - 60 kN	
Stroke / opening width	40.5 mm	
Crimping range Cu	10 - 240 mm ²	
Crimping range Al	50 - 240 mm ²	
Crimping cycle	2 s (for ARS) to 7 s (depending on cross-section)	
Charging time	15 min.	
Weight incl. battery	2.5 kg	
Ambient temperature	-10 °C up to +40 °C	
Item	Part No. Bosch	Part No. Makita
Battery powered hydraulic crimping tool 10 - 240 mm ²	EKM60IDCFB	EKM60IDCFM
Scope of supply		Page
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU	484
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU	486
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1 483
Makita quick-charger for 18 V Li-Ion battery		LGL1 486
Plastic case	KK50NG	KK50NG
Accessories		Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU	485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40 484
Variants		Page
L-BOXX with battery powered crimping tool EKM60IDCFB, 10 - 240 mm ²	LBOXXEKM60IDCFB	203
L-BOXX with battery powered crimping tool EKM60IDCFM, 10 - 240 mm ²		LBOXXEKM60IDCFM 203

EK 120 ID Battery powered hydraulic crimping tool 35 - 500 mm²

**NEXT
GENERATION**



- ▶ For superfine-stranded conductors to 500 mm²
- ▶ Indent crimping, no dies required
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Technical data	
Crimping force	108 kN
Stroke / opening width	52 mm
Crimping range	35 - 500 mm ²
Crimping cycle	10 s to 11 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	7.0 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 35 - 500 mm ²	EK120IDCFB	EK120IDCFM	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484

Suitable for	Connection material	Crimping range mm ²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs and connectors, standard type, Tubular cable lugs for switch gear connections		70 - 185	
Tubular cable lugs and connectors for fine stranded conductors		70 - 240	
Terminals, connectors and pin terminals acc. to DIN			
Solderless terminals (DIN 46234) connectors and pin terminals (DIN 46230, DIN 46341)		95 - 500	



Crimping

Battery powered hydraulic crimping tools

EK 120/32 Battery powered hydraulic crimping tool 16 - 400 mm²

**NEXT
GENERATION**



- ▶ Very large crimping range up to 400 mm²
- ▶ Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Open head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 13-series interchangeable dies, wide crimping



**K13
SERIE**

Technical data			
Crimping force	120 kN		
Stroke / opening width	32 mm		
Crimping range	16 - 400 mm ²		
Crimping cycle	7 s to 8 s (depending on crimp cross-section)		
Charging time	45 min.		
Weight incl. battery	6.8 kg		
Ambient temperature	-10° C up to +40 °C		
Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 16 - 400 mm ²	EK12032CFB	EK12032CFM	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484





































Available dies for Series 13 for EK 120/32

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		333
Butt connectors, standard type		16 - 185		333
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		333
Tubular cable lugs and connectors for fine stranded conductors		10 - 150		334

See next page

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Tubular cable lugs and connectors - stainless steel, Ni				
Tubular cable lugs and connectors – VA		10 - 50		334
Tubular cable lugs and connectors – VA		70 - 95		334
Tubular cable lugs and connectors - Ni		10 - 50		334
Tubular cable lugs and connectors - Ni		70 - 95		334
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN46230) and connectors (DIN 46267, part 1) Cu		10 - 300		334
Compression joints DIN 46267 part 1		10 - 150		334
Double compression cable lugs		2 x 50 - 2 x 120		334
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		10 - 150		335
Insulated terminals and pin terminals		10 - 95		335
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 300 se / 300 sm		335
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10-300 rm/sm, 16 - 300 re/se		336
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 185 mm ²		25 - 185		336
Compression joints acc. to DIN 45085, part 3 for Al-steel cable acc. to DIN EN 50182, aluminum crimping		4-20 (St) - 25-120 (Al)		336
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, steel crimping		4-20 (St) - 25-120 (Al)		336
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10-300 rm/sm, 16 - 300 re/se		336
Clamps				
Clamps, C-type		10 - 70		337
Clamps, H-type		70 - 120		337
Cable end-sleeves				
Cable end-sleeves		25 - 240		337



Crimping

Battery powered hydraulic crimping tools

EK 120/42 Battery powered hydraulic crimping tool 16 - 400 mm²

**NEXT
GENERATION**



- ▶ C-head with very wide crimping range to 400 mm²
- ▶ Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools
- ▶ Easy handling by optimum weight distribution
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Open head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for









































- 13-series interchangeable dies, wide crimping



**K13
SERIE**

Technical data			
Crimping force	120 kN		
Stroke / opening width	42 mm		
Crimping range	16 - 400 mm ²		
Crimping cycle	8 s to 9 s (depending on crimp cross-section)		
Charging time	45 min.		
Weight incl. battery	7.1 kg		
Ambient temperature	-10 °C up to +40 °C		
Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 16 - 400 mm ²	EK12042CFB	EK12042CFM	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484

Available dies for Series 13 for EK 120/42

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		333
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		333
Tubular cable lugs and connectors for fine stranded conductors		10 - 150		334
Tubular cable lugs and connectors - stainless steel, Ni				
Tubular cable lugs and connectors – VA		10 - 50		334
Tubular cable lugs and connectors – VA		70 - 95		334
Tubular cable lugs and connectors - Ni		10 - 50		334
Tubular cable lugs and connectors - Ni		70 - 95		334
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		10 - 300		334
Double compression cable lugs		2 x 50 - 2 x 120		334
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		10 - 150		335
Insulated terminals and pin terminals		10 - 95		335
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 300 se / 300 sm		335
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10-300 rm/sm, 16 - 300 re/se		336
Compression points for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 185 mm ²		25 - 185		336
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, aluminum crimping		4-20 (St) - 25-120 (Al)		336
Compression joints acc. to DIN 45085, part 3 for Al-steel cables acc. to DIN EN 50182, steel crimping		4-20 (St) - 25-120 (Al)		336
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10-300 rm/sm, 16 - 300 re/se		336
Clamps				
Clamps, C-type		10 - 70		337
Clamps, H-type		70 - 120		337
Cable end-sleeves				
Cable end-sleeves		25 - 240		337



Crimping

Battery powered hydraulic crimping tools

EK 120 U Battery powered hydraulic crimping tool 16 - 400 mm²

**NEXT
GENERATION**



- ▶ H-head for deep groove crimps
- ▶ Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for









































- 13-series interchangeable dies, wide crimping

**K13
SERIE**



Technical data			
Crimping force	120 kN		
Stroke / opening width	20 mm		
Crimping range	16 - 400 mm ²		
Crimping cycle	7 s to 8 s (depending on crimp cross-section)		
Charging time	45 min.		
Weight incl. battery	6.2 kg		
Ambient temperature	-10° C up to +40 °C		
Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 16 - 400 mm ²	EK120UCFB	EK120UCFM	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484

Available dies for Series 13 for EK 120 U

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		333
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		333
Tubular cable lugs and connectors for fine stranded conductors		10 - 150		334
Tubular cable lugs and connectors - stainless steel, Ni				
Tubular cable lugs and connectors – VA		10 - 50		334
Tubular cable lugs and connectors – VA		70 - 95		334
Tubular cable lugs and connectors - Ni		10 - 50		334
Tubular cable lugs and connectors - Ni		70 - 95		334
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		10 - 300		334
Double compression cable lugs		2 x 50 - 2 x 120		334
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		10 - 150		335
Insulated terminals and pin terminals		10 - 95		335
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 300 se / 300 sm		335
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10-300 rm/sm, 16 - 300 re/se		336
Compression points for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 185 mm ²		25 - 185		336
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, aluminum crimping		4-20 (St) - 25-120 (Al)		336
Compression joints acc. to DIN 45085, part 3 for Al-steel cables acc. to DIN EN 50182, steel crimping		4-20 (St) - 25-120 (Al)		336
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10-300 rm/sm, 16 - 300 re/se		336
Clamps				
Clamps, C-type		10 - 70		337
Clamps, H-type		70 - 120		337
Cable end-sleeves				
Cable end-sleeves		25 - 240		337



Crimping

Battery powered hydraulic crimping tools

EK 135 FT Battery powered hydraulic crimping tool 10 - 630 mm²

**NEXT
GENERATION**



- ▶ Very large crimping range to 630 mm²
- ▶ Very powerful with a crimping force of 13.5 t
- ▶ All tool data in view thanks to display and i-press® app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display









































Suitable for

- 13-series interchangeable dies, wide crimping
- 15-series interchangeable dies, wide crimping



Technical data			
Crimping force	135 kN		
Stroke / opening width	50.8 mm		
Crimping range	10 - 630 mm ²		
Crimping cycle	ca. 10 s to 11 s (depending on cross-section)		
Charging time	45 min.		
Weight incl. battery	10.2 kg		
Ambient temperature	-10 °C up to +40 °C		
Item	Part No. Bosch	Part No. Makita	
Battery powered hydraulic crimping tool 10 - 630 mm ²	EK135FTCFB	EK135FTCFM	
Scope of supply			
Adapter for crimping dies series 13	UA15T	UA15T	Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		486
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484
Makita quick-charger for 18 V Li-Ion battery		LGL1	486
Plastic case	KK135FTNG	KK135FTNG	
Accessories			
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		485
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	484

Available dies for Series 13 for EK 135 FT

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		333
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		333
Tubular cable lugs and connectors for fine stranded conductors		10 - 150		334
Tubular cable lugs and connectors - stainless steel, Ni				
Tubular cable lugs and connectors – VA		10 - 50		334
Tubular cable lugs and connectors – VA		70 - 95		334
Tubular cable lugs and connectors - Ni		10 - 50		334
Tubular cable lugs and connectors - Ni		70 - 95		334
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		10 - 300		334
Double compression cable lugs		2 x 50 - 2 x 120		334
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		10 - 150		335
Insulated terminals and pin terminals		10 - 95		335
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 300 se / 300 sm		335
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10-300 rm/sm, 16 - 300 re/se		336
Compression points for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 185 mm ²		25 - 185		336
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, aluminum crimping		4-20 (St) - 25-120 (Al)		336
Compression joints acc. to DIN 45085, part 3 for Al-steel cables acc. to DIN EN 50182, steel crimping		4-20 (St) - 25-120 (Al)		336
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10-300 rm/sm, 16 - 300 re/se		336
Clamps				
Clamps, C-type		10 - 70		337
Clamps, H-type		70 - 120		337
Cable end-sleeves				
Cable end-sleeves		25 - 240		337







See next page



Crimping

Battery powered hydraulic crimping tools

Available dies for Series 15 for EK 135 FT

Suitable for	Connection material	Crimping range mm ²	Crimp profile	Page
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		400 - 625		338
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		400 - 500		338
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		400 - 500		338