



INSULATE & PROTECT

General Purpose Lockout Padlocks

- Suitable for general purpose lockout applications
- Polyamide body and stainless steel shackle
- Corrosion, chemical and UV resistant
- Key is retained within padlock when open for added security
- Includes "Danger" warning label for added visual warning
- Operating temperature : -20°C to 120°C
- Keyed Different and Keyed Different Master Key options

Ordering information - Keyed Different

Part number	Colour	Body	Body	Shackle	Shackle	Shackle
i ult humber		Width	Height	Width	Height	Diameter
T3RKDS40		38	45	20	38	6
T3YKDS40		38	45	20	38	6
T3BKDS40		38	45	20	38	6
T3GKDS40		38	45	20	38	6

Ordering information - Keyed Different Master Key

T3RKDMKS40	38	45	20	38	6
T3YKDMKS40	38	45	20	38	6
T3BKDMKS40	38	45	20	38	6
T3GKDMKS40	38	45	20	38	6

*All dimensions in mm

General Purpose Long Shackle Padlocks

- Suitable for general purpose lockout applications
- Polyamide body and steel shackle
- Corrosion, chemical and UV resistant
- Key is retained within padlock when open for added security
- Includes "Danger" warning label for added visual warning
- Operating temperature : -20°C to 120°C
- Keyed Different and Keyed Different Master Key options

Ordering information - Keyed Different

Part number	Colour	Body Width	Body Height	Shackle Width	Shackle Height	Shackle Diameter
T3RKDL80		38	45	20	76	6
T3YKDL80		38	45	20	76	6

Ordering information - Keyed Different Master Key


T3RKDMKL80	38	45	20	76	6
T3YKDMKL80	38	45	20	76	6


*All dimensions in mm

14



Safety Padlocks

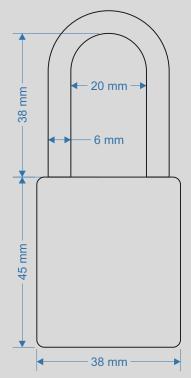

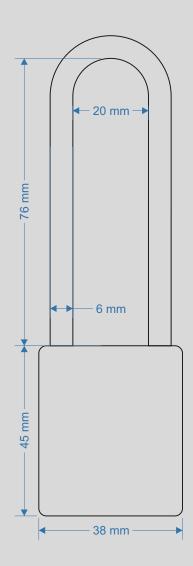

Non-conductive Lockout Padlocks

- Suitable for electrical lockout applications
- Non-conductive Polyamide body and nylon shackle
- Corrosion, chemical and UV resistant
- Key is retained within padlock when open for added security
- Includes "Danger" warning label for added visual warning
- Operating temperature : -20°C to 120°C
- Keyed Different and Keyed Different Master Key options

Ordering information - Keyed Different

Part number	Colour	Body	Body	Shackle	Shackle	Shackle
Part number		Width	Height	Width	Height	Diameter
T3RKDN40		38	45	20	38	6
T3YKDN40		38	45	20	38	6
T3BKDN40		38	45	20	38	6
T3GKDN40		38	45	20	38	6

Ordering information - Keyed Different Master Key

T3RKDMKN40	38	45	20	38	6
T3YKDMKN40	38	45	20	38	6
T3BKDMKN40	38	45	20	38	6
T3GKDMKN40	38	45	20	38	6

*All dimensions in mm

General Purpose Laminated Body Padlocks

- Suitable for general purpose lockout applications
- Laminated high strength steel body and shackle
- Corrosion, chemical and UV resistant
- Non-key retaining with red protection bumper
- Includes "Danger" warning label for added visual warning
- Operating temperature : -40°C to 95°C
- Keyed Different and Keyed Different Master Key options

Ordering information - Keyed Different


Part number	Colour	Body Width	Body Height	Shackle Width	Shackle Height	Shackle Diameter
T2RKDS24		40	32	20	24.5	6
T2RKDS64		40	32	20	52	6


Ordering information - Keyed Different Master Key

•	2		-			
T2RKDMKS24		40	32	20	24.5	6
T2RKDMKS64		40	32	20	52	6

*All dimensions in mm



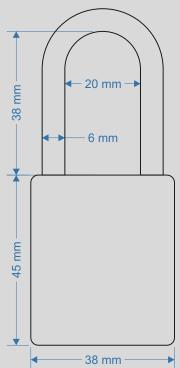

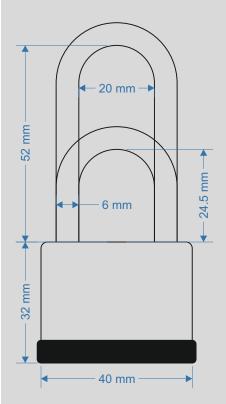

Padlock Dust Proof Covers

- Material : Black silica gel
- Dimensions : 33 x 49.5mm

Ordering information

Part number	Description
EL-PDC	Black Silica Dust Cover

U.K. Office : Tel: +44 (0)141 941 3689 U.A.E. Office : Tel: +971 (0)4 887 5570 sales@expresselectrical.co.uk info@expresselectrical.ae www.expresselectrical.co.uk





Coated Steel Lockout Hasps


- Material : Nylon coated galvanised steel
- Shackle hole diameter options : 25mm & 38mm
- Number of lock holes : 6
- Lock hole diameter : 10.5mm
- Dimensions : 40 x 115mm & 40 x 128mm
- * Hasp body colour : Red

Ordering information

Part number	Description
EL-CSH-S	Coated Steel Hasp with 25mm Shackle
EL-CSH-L	Coated Steel Hasp with 38mm Shackle



Hasps & Cables




Coated Aluminium Lockout Hasps

- Material : Nylon coated aluminium
- Shackle hole diameter options : 25mm & 38mm
- Number of lock holes : 6
- Lock hole diameter : 10.5mm
- Dimensions : 40 x 112mm & 40 x 123mm
- * Hasp body colour : Red

Ordering information

Part number	Description
EL-AHR-S	Coated Aluminium Hasp with 25mm Shackle
EL-AHR-L	Coated Aluminium Hasp with 38mm Shackle






Oxidised Aluminium Lockout Hasp

- Material : Oxidised aluminium alloy
- Shackle inside dimensions : 27 x 33mm
- Shackle diameter : 5mm
- Number of lock holes : 6
- · Lock hole diameter : 8mm
- Dimensions : 50 x 116mm
- * Hasp body colour : Yellow

Ordering information

Part number	Description
EL-YSH-6	Oxidised Aluminium Hasp Yellow







To purchase these products visit us online at www.expresselectrical.co.uk

Non-conductive Nylon Lockout Hasp


- · Suitable for electrical and explosion proof applications
- Shackle inside dimensions : 25 x 45mm
- Shackle diameter : 3mm
- Number of lock holes : 4
- · Lock hole diameter : 7.5mm
- Dimensions : 61 x 107mm
- * Hasp body colour : Yellow


Ordering information

Part number	Description
EL-NHY-3	Nylon 4 Hole Lockout Hasp Yellow



Hasps & Cables



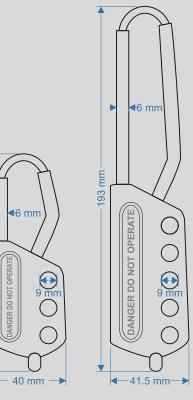

€6 mm

SER DO NOT OPERA

115 mm

Non-conductive Nylon Lockout Hasps

- Suitable for electrical and explosion proof applications
- Shackle length options
- Number of lock holes : 3 or 6
- Lock hole diameter : 9mm
- Dimensions : 40 x 115mm & 41.5 x 193mm
- * Hasp body colour : Red

Ordering information

Part number	Description
EL-NLH-36	Nylon 3 Hole Lockout Hasp Small
EL-NLH-66	Nylon 6 Hole Lockout Hasp Large

Multi-purpose Lockout Cables

- Wheel or wrench operation options
- Impact resistant nylon lock body
- · Stainless steel cable with UV resistant PVC coating
- Suitable for padlock shackles ≤ 7mm
- Wheel cable dimensions : 4mm diameter x 2 metres
- Wrench cable dimensions : 3.5mm diameter x 2.4 metres

Ordering information

Part number	Description
EL-WM+2M	Wheel Type Cable Lockout 2 Metres
EL-PM+2M	Wrench Type Cable Lockout 2.4 Metres

U.K. Office : Tel: +44 (0)141 941 3689 U.A.E. Office : Tel: +971 (0)4 887 5570

sales@expresselectrical.co.uk info@expresselectrical.ae



www.expresselectrical.co.uk www.expresselectrical.ae



Push Button Circuit Breaker Lockouts

- · Suitable for most existing ISO/DIN circuit breakers
- Pin-in, Pin-out, Pin-out wide, universal and simple options
- Simple push button operation
- · Use in conjunction with a padlock to ensure permanent lockout



Ordering information Keyhole Hole Keyhole Part number Description Colour Spacing Diameter EL-PI Mini Breaker Pin In Standard ≤ 12mm ≤ 7mm **EL-PO** Mini Breaker Pin Out Standard ≤ 12mm ≤7mm **EL-POW** Mini Breaker Pin Out Wide ≤ 20mm ≤ 7mm

No-Tool Circuit Breaker Lockouts

- · No tools required, simply lock in place by hand
- · Fast and easy to install
- · Manufactured from durable high strength nylon
- · Supplied with the integrated chrome plated brass screw

Ordering information

Part number	Description	Colour	Toggle Switch	Keyhole Diameter
EL-UNHT	Circuit Breaker Lockout - No-tool Type 1		≤ 7.9mm	≤ 7mm
EL-UNHTB	Circuit Breaker Lockout - No-tool Type 2		≤ 12mm	≤ 8.6mm
EL-SPCBL	Circuit Breaker Lockout - No-tool Type 3		≤ 12mm	≤ 8.6mm

Screw Lock Circuit Breaker Lockouts

- Suitable for all types of circuit breakers
- · Use a screwdriver to lock in place
- Manufactured from durable high strength nylon
- · Accommodates a padlock to ensure permanent lockout

Ordering information

Part number	Description	Colour	Toggle	Keyhole
Fait liulibei			Switch	Diameter
EL-SCBL	Circuit Breaker Lockout Aluminium		≤ 7.9mm	≤ 7mm
EL-ABCBL	Circuit Breaker Lockout Nylon - Small		≤ 7.9mm	≤ 7mm
EL-MGCBL	Circuit Breaker Lockout Nylon - Medium		≤ 10.3mm	≤ 7mm
EL-BTCBL	Circuit Breaker Lockout Nylon - Large		≤ 20mm	≤ 7mm

Clamp-on Circuit Breaker Lockouts

- · No tools required, simply lock in place using the thumbscrew
- Integrated hinged cover prevents clamp being loosened
- · Accommodates a padlock to ensure permanent lockout
- Manufactured from durable high strength nylon

Ordering information

Part number Description	Description	Colour	Handle	Keyhole
	Description	Colour	Width	Diameter
EL-KT-S	Clamp-on Circuit Breaker Lockout Small		≤ 18mm	≤ 7mm
EL-KT-M	Clamp-on Circuit Breaker Lockout Medium		≤ 42mm	≤ 7mm
EL-KT-L	Clamp-on Circuit Breaker Lockout Large		≤ 72mm	≤ 7mm







EL-BTCBL





Hinged Cover



Electrical Lockout







EL-UNHTB







To purchase these products visit us online at www.expresselectrical.co.uk







Multi-Purpose Electrical Cabinet Lockout Device

- · Manufactured from high strength plastic and galvanised steel
- · Designed for use on electrical cabinets and panels
- · Lockout applications include switches and cabinet key holes
- Plastic base dimensions : 54x51mm (WxH)

Ordering information

Part number	Description	Keyhole Diameter
EL-YPL-1	Multi-purpose Lockout Device with Flat Lockout Arm	≤ 7mm
EL-YPL-2	Multi-purpose Lockout Device with Raised Lockout Arm	≤ 7mm

Push-Button, Switch and Socket Lockout

- · Manufactured from durable high strength materials
- · Simple effective solution
- · Suitable for use with a variety of sockets and switches
- · Ensure permanent lockout with padlock

Ordering information

Part number	rt number Description	
EL-PB-30	Push-button Box Lockout 47.3x50mm c/w 30mm Diameter Hole	≤ 7mm
EL-PBC-55	Push-button Circular Lockout 55x65mm c/w 46mm Diameter Hole	≤ 7mm
EL-WSLB	Universal Switch Lockout Cover 74x74mm	≤ 7mm
EL-WSL-R	Universal Switch Lockout Cover 45x120mm	≤ 7mm

Electrical Plug and Industrial Socket Lockout

- Manufactured from durable polypropylene
- · Quick and easy to install, simple lockout solution
- · Electrical plug lockout available in two sizes
- Industrial socket lockout available in 44 or 63mm diameter

Ordering information

Part number	Description	Keyhole
r art number		Diameter
EL-RPLS	Electrical Plug Lockout Suitable for Cable Diameters ≤ 13mm	≤ 7mm
EL-RPLL	Electrical Plug Lockout Suitable for Cable Diameters ≤ 25mm	≤ 7mm
EL-PSL-M	Industrial Waterproof Socket Lockout 44mm Diameter	≤ 7mm
EL-PSL-L	Industrial Waterproof Socket Lockout 63mm Diameter	≤ 7mm

Pendant Controller Switch Lockout

- · Manufactured from tear resistant polyester cloth
- Place bag around the pendant and tighten to secure
- · Bags can accommodate multiple devices if required
- · Use of a padlock ensures the device can not be operated

Ordering information

Part number	Description	Keyhole Diameter
EL-PNDT-S	Pendant Controller Lockout Bag Small 250x440mm	≤ 7mm
EL-PNDT-L	Pendant Controller Lockout Bag Large 250x660mm	≤ 7mm

U.K. Office : Tel: +44 (0)141 941 3689 | sales@expresselectrical.co.uk | www.expresselectrical.co.uk U.A.E. Office : Tel: +971 (0)4 887 5570 | info@expresselectrical.ae | www.expresselectrical.ae











FL-PBC-55





EL-WSLB

EL-WSL-R





EL-PSL





INSULATE & PROTECT



Gate Valve Lockout

- Manufactured from durable high strength materials
- Simple effective solution
- Available in a range of sizes to suit the valve diameter
- Permanently lockout with a padlock

Ordering information

Part number	Description	Keyhole
1 unt municor		Diameter
EL-GVL-1	Gate Valve Lockout with Diameter Range 25 - 64mm	≤ 7mm
EL-GVL-2	Gate Valve Lockout with Diameter Range 64 - 127mm	≤ 7mm
EL-GVL-3	Gate Valve Lockout with Diameter Range 127 - 165mm	≤ 7mm
EL-GVL-4	Gate Valve Lockout with Diameter Range 165 - 254mm	≤ 7mm
EL-GVL-5	Gate Valve Lockout with Diameter Range 254 - 330mm	≤ 7mm
EL-AGVL-6	Adjustable Gate Valve Lockout with Diameter Range 25 - 165mm	≤ 7mm

Ball Valve Lockout

- Manufactured from durable high strength Polypropylene
- Lock handle in required position
- Adjustable to suit a range of pipe diameters
- Permanently lockout with a padlock

Ordering information

	Part number	Description	
	EL-RBVLR-1	Adjustable Ball Valve Lockout with Diameter Range 13 - 64mm	≤ 7mm
	EL-RBVLR-3	Adjustable Ball Valve Lockout with Diameter Range 50 - 200mm	≤ 7mm
	EL-PBVL-2	Adjustable Ball Valve Lockout with Diameter Range 13 - 70mm	≤ 7mm



Mechanical Lockout









Butterfly Valve Lockout

- Manufactured from durable high strength Polypropylene
- Lock handle in required position
- Adjustable lock range suit a range of valves
- · EL-UBFV is used in conjunction with a cable lockout

Ordering information

Part number	Description	Keyhole Diameter
EL-BFV	Adjustable Butterfly Valve Lockout with Diameter Range 8 - 45mm	≤ 7mm
EL-UBFV	Adjustable Butterfly Valve Lockout with Angle Range 15° - 36°	≤ 4mm

Blind Flange Lockout

- Manufactured from steel and high strength plastic
- · Device conceals and prevents removal of flange bolt
- Adjustable range of 23 32mm
- Complete the lockout with use of a padlock

Ordering information

Part number	Description	Keyhole Diameter
EL-FLNG	Adjustable Blind Flange Lockout with Range of 23 - 32mm	≤ 7mm





EL-BFV



To purchase these products visit us online at www.expresselectrical.co.uk

INSULATE & PROTECT

EL-UBFV

Lockout Device Storage Cabinet

- Lockable steel storage cabinet
- Two movable shelves provide a flexible storage space
- Wall mount for ease of use and accessibility
- Can accommodate multiple lockout tagout devices

Ordering information

Ordering information			
Part number	Description	Dimensions (WxHxD)	
EL-LSW2SC	Lockable Wall Mountable Steel Storage Cabinet	360 x 450 x 155mm	



Storage & Stations



EL-LSW2SC

Key Management Storage Cabinet

- · Lockable steel key management storage cabinet
- · Keys can be arranged in an organised fashion
- Wall mount for ease of use and accessibility
- 48 key positions with labelling above each key hook

Ordering information

Part number	Description	Dimensions (WxHxD)
EL-KS48	Lockable Wall Mountable Steel Storage Cabinet	305 x 500 x 50mm




EL-KS48

Lockout Tagout Stations

- · Stations with lockable cover or open station options
- Store and protect lockout tagout devices
- Wall mount for ease of use and accessibility
- Available in a range of sizes to suit your requirements

Ordering information

Part number	Description	Dimensions (WxHxD)
EL-LSWC-5L	Small Lockout Station with Cover. (5 hooks)	406 x 315 x 65mm
EL-LSWC-10L	Large Lockout Station with Cover. (14 hooks)	558 x 395 x 65mm
EL-LS5L2H	Small Lockout Station without Cover. (9 hooks)	385 x 290 x 45mm
EL-LS10L2H	Large Lockout Station without Cover. (18 hooks)	360 x 350 x 45mm







EL-LSWC-5L

EL-LSWC-10L





EL-LS5L2H

EL-LS10L2H

Portable LOTO Storage Solutions

- Red steel lockout box can accommodate 12 padlocks
- Box can accommodate several locks, hasps and devices
- Blue carry bag with hand and shoulder straps
- Tear resistant material for added durability

Ordering information

Part number	Description	Dimensions (WxHxD)
EL-GLB-13	Red Steel Lockout Box	233 x 195 x 95mm
EL-BAG-S	Blue Fabric Carry Bag	310 x 230 x 200mm

U.K. Office : Tel: +44 (0)141 941 3689 | <u>sales@expresselectrical.co.uk</u> | <u>www.expresselectrical.co.uk</u> U.A.E. Office : Tel: +971 (0)4 887 5570 | <u>info@expresselectrical.ae</u> | <u>www.expresselectrical.ae</u>

Write-on Double Sided Tags

• A range of lockout safety tags with pre-printed warning messages







L-TAG03





EL-TAG07

82



EL-TAG02





EL-TAG06



LOTO Identification

- Pre-printed warning messages
- Printed on both sides of tag
- Highly visible colours
- Clear instructions
- Easy to read from distance
- Visible in low level lighting
- Laminated for durability
- Resistant to grease and dirt
- Write-on area for additional information
- Wipe off hand written text and re-use
- Fixing hole allows attachment to device
- Brass fixing ring for added pull strength
- Dimensions : 80 x 143mm (WxH)
- Hole diameter : 10mm
- Material : PVC

To purchase these products visit us online at <u>www.expresselectrical.co.uk</u>

Ladder & Scaffold Tags

- Manufactured from durable high strength ABS material
- Supplied with write-on coloured insert tags
- Fixing holes for attachment to equipment
- Write-on area for additional information


Ordering information

Part number	Description	
EL-LADTAGINS	Holder dimensions : 55.7 x 212 x 6mm (WxHxD) Insert tag dimensions : 51 x 182mm (WxH) Fixing slots : 4 off 4 x 8mm (WxH) Fixing holes : 2 off 3mm diameter	
EL-SCAFTAGINS	Holder dimensions : 92 x 192.9 x 6mm (WxHxD) Insert tag dimensions : 85 x 210mm (WxH) Fixing slots : 4 off 3.9 x 9mm (WxH) Fixing holes : 2 off 3.2mm diameter	



SCAFFOLD TAG ERECTION AND INSPECTION RECORD		
TO BE COMPLETED BY SUPERVISOR	THIS SIGN COULD M PROSECUTIO	
LOCATION:	AUTHORISED PERSON	
REQUESTED BY:	DATE	SIGNED
DATE:		
SIGNATURE:		
STRUCTURE TO BE USED FOR LIGHT DUTY 1.50 kN/m² / 150Kg/m² GENERAL PURPOSE 2.00 kN/m² / 200Kg/m² HEAVY DUTY 2.50 kN/m² / 250Kg/m² SPECIAL PURPOSE Kg/m²		
TO BE COMPLETED BY INSPECTOR		
INSPECTORS SIGNATURE: DATE: BEFORE BEING TAKEN INTO USE FOR THE FIRST TIME	No. of RUNGS: No. of STANDARDS: No. of LIFTS: AREA OF BOARDING:	
	STRUCTURE DECOMMISSIONED D	ATE:

EL-SCAFTAGINS



Insert Card Identification System

Green card Ladder/scaffold is "Safe to Use"

Yellow card Ladder/scaffold is "Under Maintenance"

Red card (no card) Ladder/scaffold "Do Not Use"

- Pre-printed holder and insert tags
- Highly visible colours
- Clear instructions
- Easy to read from distance
- Visible in low level lighting
- Resistant to grease and dirt
- Write-on area for additional information
- Wipe off hand written text and re-use
- Various fixing holes options on holder
- Holder : High strength ABS
- Insert tag : PVC

U.K. Office : Tel: +44 (0)141 941 3689 | <u>sales@expresselectrical.co.uk</u> | <u>www.expresselectrical.co.uk</u> U.A.E. Office : Tel: +971 (0)4 887 5570 | <u>info@expresselectrical.ae</u> | <u>www.expresselectrical.ae</u>