



ABRASION/MECHANICAL

Expando® TCP V0

Product Highlights

- Operating temperature -50°C to +150°C (-58°F to +302°F)
- 1 : 2 expansion ratio
- Self extinguishable
- Zero halogen
- UL 94 V0 (raw material)
- Excellent abrasion resistance


Installation Features

- Flexible
- Bundling solution



Our manufacturing sites are certified ISO 9000, QS 9000 or ISO/TS 16949 and ISO 14001

EXPTCPV0_08312011

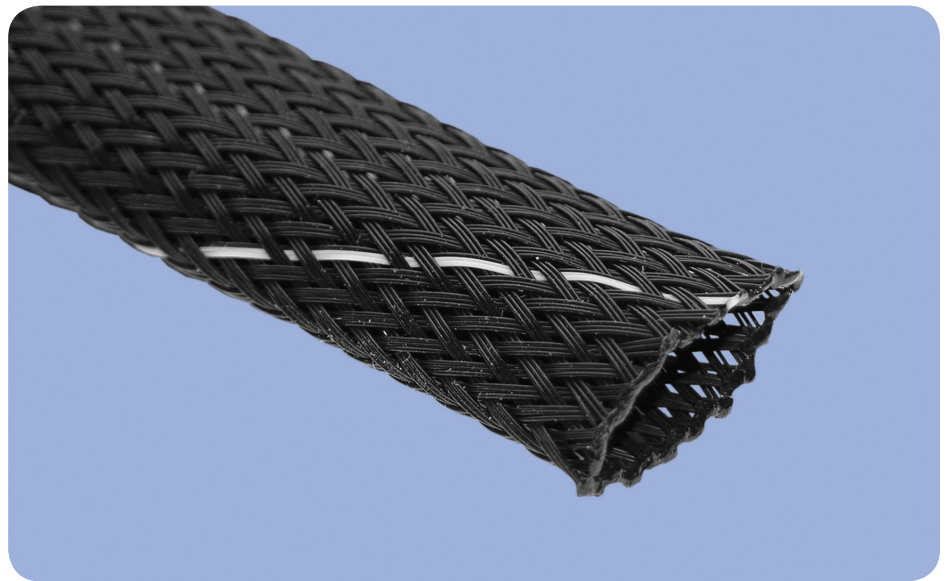

Expando® TCP V0 is an expandable braided sleeve manufactured from modified polyester monofilaments classified UL 94 V0 which are offering excellent flame-retardant properties. It is designed for the protection of tubing and the maintenance of wire and cable bundles.

This product has a highly expandable structure which allows for easy installation over long lengths even after the fitting of end connectors. Expando TCP V0 has an expansion ratio which enables a large number of diameters to be covered with a limited range of sizes.

The product is used in a wide range of industries including railway and electrical / electronical devices.

BentleyHarris®
Protection Products

Performance Data – Expando® TCP V0

Property	Test Method	Result
Operating temperature		-50°C (-58°F) to +150°C (+302°F)
Fire / Smoke / Toxicity	UL 94 NF F 16 101- 16 102 DIN 5510 §2 & 54837 CEI 20-38 ASTM E 662 – ASTM E 162	Raw material classified V0 I2 F1 Zero halogen S4, SR2, ST2 T = 1,3 Pass
Fluid Resistance - Hydraulic fluids: NATO.0.156	EN 6059-303 Immersion for 24hrs at +70°C (+158°F)	No visible degradation or alteration after being exposed

All numeric performance data shows average or typical values.

Product Specifications

Longitudinal shrinkage should be taken into account when utilizing expansion properties of the sleeve.

Commercial Part Number	Recommended Application Range		Standard Packaging m (ft)	
	Min Ø mm (in)	Max Ø mm (in)	Cardboard Spools	Plastic Spools
Expando TCP V0 3	2 (5/64")	5 (13/64")	200 (656')	1000 (3280')
Expando TCP V0 4	3 (1/8")	7 (9/32")	200 (656')	1000 (3280')
Expando TCP V0 5	4 (5/32")	8 (5/16")	200 (656')	1000 (3280')
Expando TCP V0 6	5 (13/64")	9 (23/64")	200 (656')	1000 (3280')
Expando TCP V0 8	6 (1/4")	12 (15/32")	200 (656')	500 (1640')
Expando TCP V0 10	7 (9/32")	15 (19/32")	100 (328')	500 (1640')
Expando TCP V0 12	10 (25/64")	18 (45/64")	100 (328')	500 (1640')
Expando TCP V0 15	12 (15/32")	23 (29/32")	50 (164')	400 (1312')
Expando TCP V0 20	16 (5/8")	28 (1")	50 (164')	400 (1312')
Expando TCP V0 25	21 (53/64")	35 (1-3/8")	50 (164')	400 (1312')
Expando TCP V0 30	26 (1")	45 (1-3/4")	50 (164')	300 (984')
Expando TCP V0 40	36 (1-1/2")	60 (2-23/64")	50 (164')	300 (984')
Expando TCP V0 50	45 (1-3/4")	75 (3")	50 (164')	200 (656')

Availability

Expando TCP V0 is available in sizes 3 to 50 mm (1/8" to 2"). Standard colors: black with a grey tracer or grey with a black tracer.

Expando TCP V0 is supplied on plastic and cardboard spools. Packaging according to GALIA (ODETTE) standard.

Part Numbering System

Example	Product Name	Size	Color	Quantity
	Expando TCP V0	4	0/8 (black with gray tracer)	1000 m (3280 ft)

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2008 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products.

USA: (1) 800 926 2472
Europe: (33) 3 44 39 06 06
Japan: (81) 45 479 0201
China: (86) 21 6182 7688

www.federalmogul.com/sp

BentleyHarris®
Protection Products