


### Cable tags for holders

4mm push in markers, for PM holders

MG-TPM tags are used for marking cables, conduit, tubes and equipment.

Presented in stem format, tags are simply snapped off their stems and inserted into the appropriate holders.

# MG-TPM

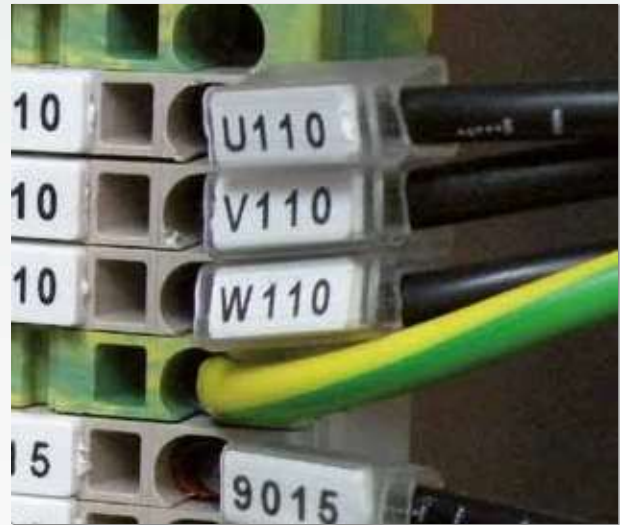

**Material:** ABS, self extinguishing class V0: UL94

**Operating temperature range:** -30°C (-22°F) to +80°C (+176°F)



| Size mm | Type  |        | Tags per sheet | Quantity | SW code |
|---------|-------|--------|----------------|----------|---------|
|         | white | yellow |                |          |         |
| 4 x 10  | 40090 | 40040  | 45             | 2.250    | 1       |
| 4 x 12  | 40091 | 40041  | 45             | 2.250    | 2       |
| 4 x 15  | 40092 | 40042  | 45             | 2.250    | 3       |

template with PET support..... page 10  
 ribbons..... page 11  
 tag holders PM..... page 115  
 tag holders light PM-L..... page 119  
 tag holders PM-AC..... page 122  
 tag holders PM-ET..... page 123  
 tag holders PM-DT..... page 124

