


Pan-Ty® Cable Ties – Weather Resistant Polypropylene



- For chemical resistance where high loop tensile strength is not required especially in the presence of hydrochloric acid, salts, and bases
- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation



Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			

Miniature Cross Section

PLT1M-M100	3.9	99	0.098	2.5	0.043	1.1	0.87	22	11	49	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	50000
------------	-----	----	-------	-----	-------	-----	------	----	----	----	--------------------------------	------	-------

Intermediate Cross Section

PLT1.5I-M100	5.6	142	0.142	3.6	0.045	1.1	1.38	35	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	25000
--------------	-----	-----	-------	-----	-------	-----	------	----	----	----	--------------------------------	------	-------

Standard Cross Section

PLT2S-M100	7.4	188	0.190	4.8	0.052	1.3	1.88	48	30	133	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	1000	10000
PLT3S-M100	11.5	292	0.190	4.8	0.052	1.3	3.00	76					
PLT4S-M100	14.5	368	0.190	4.8	0.052	1.3	4.00	102	30	133		1000	5000


Light-Heavy Cross Section (Straight Tip)

PLT2H-TL100	8.1	206	0.300	7.6	0.075	1.9	2.00	51	50	222	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500
PLT3H-TL100	11.4	290	0.300	7.6	0.075	1.9	3.00	76					
PLT4H-TL100	14.5	368	0.300	7.6	0.075	1.9	4.00	102					



Pan-Ty® Cable Ties – HALAR® – Distinctive Maroon Color

- UL Listed for use in plenum or air handling spaces per NEC, Section 300-22 (C) and (D)
- Low smoke density and excellent flammability rating of UL 94V-0
- Commonly accepted solution for bundling qualified cable without conduit in air handling space applications
- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- Provides primary support for a flexible conduit, flexible tubing, or cable in accordance with the relevant national installation code

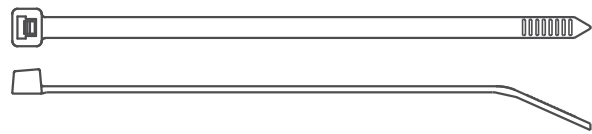

Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			

Miniature Cross Section – Plenum Rated

PLT1M-C702Y	4.0	102	0.098	2.5	0.043	1.1	0.87	22	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	100	1000
-------------	-----	-----	-------	-----	-------	-----	------	----	----	----	--------------------------------	-----	------

Standard Cross Section – Plenum Rated ★ NEW! UL TYPE 2S Rated

PLT2S-C702Y	7.4	188	0.190	4.8	0.055	1.4	1.88	48	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	100	1000
PLT3S-C702Y	11.6	295					3.00	76					

▲HALAR is a registered trademark of Solvay Solexis

Order number of pieces required, in multiples of Standard Package Quantity.