

18.0 V CORDLESS HYDRAULIC CRIMPING TOOL

B1350-CE

general features

MAIN APPLICATIONS - max section sqmm

Section sqmm	0.25-1.5	1.5-2.5	4-6	10	16	25	35	50	70	95	120	150	185	200	240	300	400	500	630	800	1000	
L.V. lugs and splices																						
Insulated terminals																						
"C" sleeve Connectors																						
H.V. lugs																						
H.V. Splices*																						

*limited to the cable insulation diameter

These tools are supplied without dies. For die selection, please refer to chart on pages 246 to 262

TECHNICAL FEATURES

Crimping force kN	132
Dimensions mm	
Length	338
Height	344
Width	83
Jaw Opening mm	25
Battery	18.0V 5.2Ah
Weight kg (with Battery)	6.5

STORAGE


Type	VAL-P39
Dimensions mm L x W x H	520 x 432 x 126
Weight kg	2.6
Supplied with the tool	✓



- The tool is supplied as:
- Basic tool with battery and shoulder strap
 - Spare battery
 - Battery charger
 - USB cable
 - Plastic carrying case suitable for storing the tool and 8 die sets



B1350-CE-KV version also available for Power Supply Companies

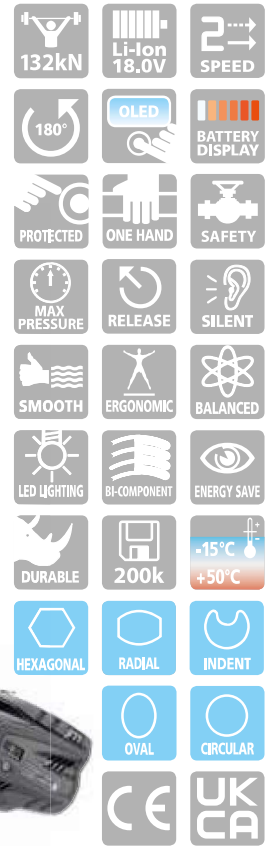

MAIN APPLICATIONS - max section sqmm

Section sqmm	0.25-1.5	1.5-2.5	4-6	10	16	25	35	50	70	95	120	150	185	200	240	300	400	500	630	800	1000	
L.V. lugs and splices																						
Insulated terminals																						
"C" sleeve Connectors																						
H.V. lugs and splices																						

These tools are supplied without dies. For die selection, please refer to chart on pages 246 to 262

TECHNICAL FEATURES

Crimping force kN	132
Dimensions mm	
Length	395
Height	372
Width	83
Jaw Opening mm	42
Battery	18.0V 5.2Ah
Weight kg (with Battery)	8.1

STORAGE

Type	VAL-P39
Dimensions mm L x W x H	520 x 432 x 126
Weight kg	2.6
Supplied with the tool	✓



- The tool is supplied as:
- Basic tool with battery and shoulder strap
 - Spare battery
 - Battery charger
 - USB cable
 - Plastic carrying case suitable for storing the tool and 8 die sets



B1350L-CE-KV version also available for Power Supply Companies

B1350L-CE

same characteristics as B1350-CE except: B1350L-CE version, featuring a large 42 mm jaw opening, for an easier introduction/removal of large size compression terminations and joints.

