




Pan-Ty® Cable Ties – Heat Stabilized Weather Resistant Nylon 6.6

- Greater resistance to damage caused by ultraviolet light and for high temperature applications up to 239°F (115°C) – indoor or outdoor use
- One-piece construction for consistent performance and reliability

- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

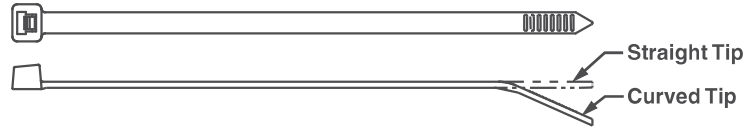

Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			

Miniature Cross Section ^{NEW!} Plenum Rated

PLT1M-M300	3.9	99	0.098	2.5	0.035	0.9	0.87	22	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	50000
------------	-----	----	-------	-----	-------	-----	------	----	----	----	--------------------------------	------	-------

Intermediate Cross Section ^{NEW!} Plenum Rated

PLT1.5I-M300	5.6	142	0.142	3.6	0.045	1.1	1.38	35	40	178	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	25000
PLT2I-M300	8.0	203	0.142	3.6	0.045	1.1	2.00	51					

Standard Cross Section ^{NEW!} Plenum Rated

PLT1S-M300	4.8	122	0.190	4.8	0.052	1.3	1.00	25	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	1000	10000
PLT2S-M300	7.4	188	0.190	4.8	0.052	1.3	1.88	48					
PLT4S-M300	14.5	368	0.190	4.8	0.052	1.3	4.00	102	50	222		1000	5000

Light-Heavy Cross Section (Straight Tip) ^{NEW!} Plenum Rated

PLT2H-TL300	8.4	213	0.300	7.6	0.075	1.9	2.00	51	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500
PLT4H-TL300	14.5	368	0.300	7.6	0.075	1.9	4.00	102					