



Pan-Ty® Lashing Ties – Weather Resistant Nylon 6.6


- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Typically used for heavy duty applications
- Among the strongest Pan-Ty® Cable Tie available
- Can be used with MCEH mounting clip, shown below



Lashing Tie



No Buckle Design

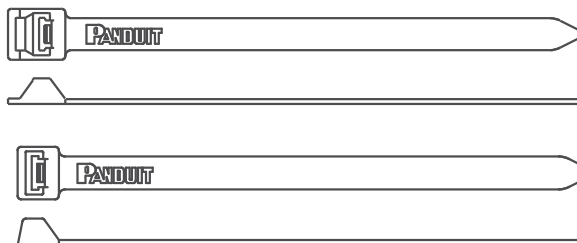




Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
Extra-Heavy Cross Section													
PLT2EH-Q0	9.0	229	0.500	12.7	0.075	1.9	2.00	51	250	1112	GS4EH-E, ST3EH	25	250
PLT5EH-Q0	20.1	511	0.500	12.7	0.075	1.9	5.00	127					
PLT6EH-Q0	22.2	564	0.500	12.7	0.075	1.9	6.00	152					
PLT8EH-Q0	28.3	719	0.500	12.7	0.085	2.2	8.00	203					
PLT10EH-Q0	34.2	869	0.500	12.7	0.085	2.2	10.00	254					
PLT12EH-Q0	40.1	1019	0.500	12.7	0.085	2.2	12.00	305					
Extra-Heavy Cross Section (No Buckle Design)													
PLT3EH-NB-C0	12.2	310	0.500	12.7	0.075	1.9	3.30	84	250	1112	GS4EH-E, ST3EH	100	1000
PLT5EH-NB-C0	19.8	503	0.500	12.7	0.075	1.9	5.00	127					
PLT6EH-NB-C0	21.8	554	0.500	12.7	0.075	1.9	6.00	152					

Note: UL Recognized and CSA Certified except the No Buckle Design



Lashing Tie Mounting Clip – Weather Resistant Nylon 6.6

- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Converts Panduit® lashing ties into clamps
- Easily snaps in place for a secure clamp
- Use with lashing ties shown on pages B1.9, B1.11, B1.20, B1.22 and B1.23



Part Number	Height A		Width B		Length C		Mounting Method	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm			
MCEH-S25-C0	0.13	3.3	0.67	17.0	1.38	35	1/4" (M6) screw (not flathead)	100	1000