

B1





Pan-Ty® Cable Ties – Weather Resistant Nylon 6.6

B2

- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Versatile cable ties can be used in countless applications
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- UL Listed for use in plenum or air handling spaces per NEC except PLT.6SM and PLT5H/6H/8H/13H

B3

C1

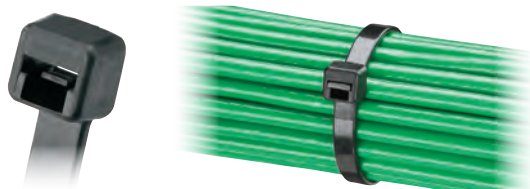

C2

C3

Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			

Subminiature Cross Section

PLT.6SM-C0	2.8	71	0.070	1.8	0.030	0.8	0.60	15	8	36	GTS-E, PTS	100	1000
------------	-----	----	-------	-----	-------	-----	------	----	---	----	------------	-----	------

C4

Miniature Cross Section ★ NEW! Plenum Rated

PLT.7M-M0	3.1	79	0.090	2.3	0.032	0.8	0.68	17	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	50000
PLT1M-C0	3.9	99	0.098	2.5	0.043	1.1	.87	22	18	80		100	1000
PLT1.5M-C0	5.6	142	0.098	2.5	0.043	1.1	1.25	32					
PLT2M-C0	8.0	203	0.098	2.5	0.043	1.1	2.00	51					

D1

D2

Intermediate Cross Section ★ NEW! Plenum Rated

PLT1.5I-C0	5.6	142	0.142	3.6	0.045	1.1	1.38	35	40	178	GTS-E, GS2B-E, PTS, PPTS, STS2	100	1000
PLT2I-C0	8.0	203	0.142	3.6	0.045	1.1	2.00	51					
PLT2.5I-C0	9.7	246	0.145	3.7	0.052	1.3	2.50	64					
PLT3I-C0	11.4	290	0.145	3.7	0.052	1.3	3.00	76					
PLT4I-C0	14.5	368	0.145	3.7	0.052	1.3	4.00	102					

D3

E1

Standard Cross Section ★ NEW! Plenum Rated

PLT1S-C0	4.8	122	0.190	4.8	0.052	1.3	1.00	25	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PPTS, PTH, STS2, STH2	100	1000
PLT1.5S-C0	6.2	157	0.190	4.8	0.052	1.3	1.50	38					
PLT2S-C0	7.4	188	0.190	4.8	0.052	1.3	1.88	48					
PLT2.5S-C0	9.8	249	0.190	4.8	0.052	1.3	2.50	64					
PLT3S-C0	11.5	292	0.190	4.8	0.052	1.3	3.00	76					
PLT4S-C0	14.5	368	0.190	4.8	0.052	1.3	4.00	102	50	222		100	500
PLT4.5S-C0	15.5	394	0.190	4.8	0.052	1.3	4.50	114					
PLT5S-C0	17.5	445	0.190	4.8	0.052	1.3	5.00	127					

E2

E3

E4

Light-Heavy Cross Section (Straight Tip) ★ NEW! Plenum Rated

PLT2H-L0	8.1	206	0.300	7.6	0.075	1.9	2.00	51	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	50	500
PLT2.5H-L0	9.8	251	0.300	7.6	0.075	1.9	2.50	64					
PLT3H-L0	11.4	290	0.300	7.6	0.075	1.9	3.00	76					
PLT4H-L0	14.5	368	0.300	7.6	0.075	1.9	4.00	102	120	534		50	500
PLT4H-TL0/147	14.5	368	0.300	7.6	0.060	1.5	4.11	104.5					
PLT6LH-L0	21.9	556	0.300	7.6	0.075	1.9	6.00	152					
PLT7LH-L0	24.7	627	0.300	7.6	0.075	1.9	7.00	178					
PLT8LH-L0	27.6	701	0.300	7.6	0.075	1.9	8.00	203	120	534		50	500
PLT9LH-L0	30.5	775	0.300	7.6	0.075	1.9	9.00	229					

E5

F

G

Heavy Cross Section (Straight Tip)

PLT5H-L0	17.7	450	0.350	8.9	0.078	2.0	5.00	127	175	778	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	50	500
PLT6H-L0	20.9	530	0.350	8.9	0.078	2.0	6.00	152					
PLT8H-L0	30.6	779	0.350	8.9	0.078	2.0	9.00	229					
PLT13H-Q0	43.3	1100	0.350	8.9	0.078	2.0	13.00	330	175	778		25	500

H

B1.10

Order number of pieces required, in multiples of Standard Package Quantity.