


Part number

PEW 1643 PV



Mobile socket outlet, PLUSO series, 2 poles + PE, 4 h (yellow), 16 A, 100 ÷ 130 V

Product description		Material properties	
Product type	Socket Mobile	Colour	RAL 7035 grey, RAL 1021 yellow
Series	PEW...PV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	2 poles + 	REACH SVHC substances	Yes Lead
Clock position	4	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Technical data		Approvals / Standards	
Current	16 A	Reference standard	EN 60309-1 and -2
Voltage	100 ÷ 130 V	General ordering information	
IP degree of protection	IP67	EAN13 code	8015747072014
Further technical details		Packaging Information	
Weight	155,00 g	Packaging length	285,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging height	170,00 mm
		Packaging width	190,00 mm
		Packaging weight	1,75 kg
		Packaging volume	9,21 dm ³
		Packaging description	Carton box
		Packaging quantity	10 Pcs
		Packaging EAN code	8015747072021


Part number

PEW 1643 PV



Catalogue drawings

(16 / 32A) PEW ... PV

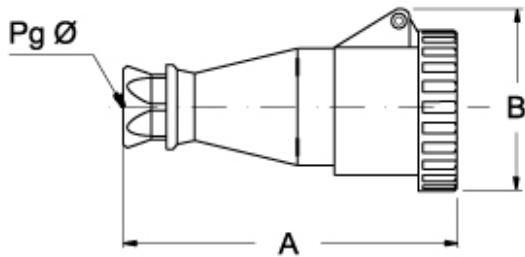

PEW ... PV		A	B	Pg Ø
16A	2P+⊕	153	77	16
	3P+⊕	158	85	16
	3P+N+⊕	166	93	21
32A	2P+⊕	183	98	21
	3P+⊕	183	98	21
	3P+N+⊕	188	105	21

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...PV)