


Part number

# PEW 6364 PQ



Flush-mounting socket outlet, PLUSO series, 3 poles + PE, 6 h (red), 63 A, 380 ÷ 415 V, straight

#### Product description

|                       |   |
|-----------------------|---|
| <b>Product type</b>   | Socket<br>Flush-mounting  |
| <b>Series</b>         | PEW...PQ, PLUSO   |
| <b>N. of poles</b>    | 3 poles +  |
| <b>Clock position</b> | 6   |
| <b>Specification</b>  | Straight  |

#### Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 63 A        |
| <b>Voltage</b>                 | 380 ÷ 415 V |
| <b>IP degree of protection</b> | IP67        |

#### Further technical details

|   |                 |
|---|-----------------|
| <b>Weight</b>                                 | 657,00 g        |
| <b>Operating temperature range (min, max)</b> | -25°C ... +40°C |

#### Material properties

|                              |  |
|------------------------------|--|
| <b>Colour</b>                | RAL 7035 grey, RAL 3000 red  |
| <b>RoHs conformity</b>       | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>China RoHs - EFUP</b>     | 50   |
| <b>REACH SVHC substances</b> | Yes<br>Lead  |
| <b>SCIP number</b>           | Ca7de37f-add8-4b77-9861-279c94903ade   |

#### Approvals / Standards

|                           |                   |
|---------------------------|-------------------|
| <b>Reference standard</b> | EN 60309-1 and -2 |
|---------------------------|-------------------|

#### General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747077484 |
|-------------------|---------------|

#### Packaging Information

|                              |                      |
|------------------------------|----------------------|
| <b>Packaging length</b>      | 290,00 mm            |
| <b>Packaging height</b>      | 140,00 mm            |
| <b>Packaging width</b>       | 215,00 mm            |
| <b>Packaging weight</b>      | 2,81 kg              |
| <b>Packaging volume</b>      | 8,73 dm <sup>3</sup> |
| <b>Packaging description</b> | Carton box           |
| <b>Packaging quantity</b>    | 4 Pcs                |
| <b>Packaging EAN code</b>    | 8015747077491        |


Part number

# PEW 6364 PQ



Catalogue drawings

(63 / 125A) PEW ... PQ

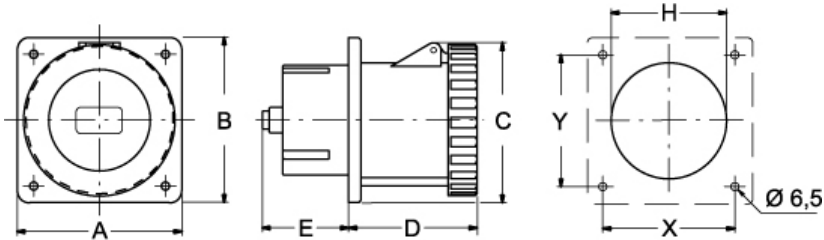

| PEW ... PQ |        | A   | B   | C   | D   | E  | H  | X   | Y   |
|------------|--------|-----|-----|-----|-----|----|----|-----|-----|
| 63A        | 2P+⊕   | 100 | 107 | 109 | 92  | 30 | 73 | 77  | 85  |
|            | 3P+⊕   | 100 | 107 | 109 | 92  | 30 | 73 | 77  | 85  |
|            | 3P+N+⊕ | 100 | 107 | 109 | 92  | 30 | 73 | 77  | 85  |
| 125A       | 2P+⊕   | 130 | 130 | 130 | 101 | 68 | 91 | 104 | 104 |
|            | 3P+⊕   | 130 | 130 | 130 | 101 | 68 | 91 | 104 | 104 |
|            | 3P+N+⊕ | 130 | 130 | 130 | 101 | 68 | 91 | 104 | 104 |

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Flange with anti-ageing gasket
- PE...PQ types (IP44), spring lid
- PEW...PQ types (IP67), spring lid with locking ring and gasket
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- IP44 and IP67 degrees of protection (EN 60529)