


12 Way Connector Strips

Connector strips provide a simple and secure solution to protect and insulate electrical connections. Manufactured from Polyethylene with brass insert connectors and galvanised screws. They are flexible, easy to cut, low-cost with raised captive screws for easy wiring.



Part Number	Cross Section	Current Rating	Rated Voltage	Dimensions (mm)							
				L	W	Ø1	Ø2	D	d1	H	h
CS12X05A	6mm ²	5-32A	380V	115	18.8	3.3	2.6	10.0	8.0	15.0	8.8
CS12X15A	12mm ²	15-61A	400V	137	22.5	4.5	2.8	12.0	10.0	18.8	10.2
CS12X30A	16mm ²	30-76A	400V	165	25.5	5.5	3.0	14.0	11.0	19.8	11.2
CS12X60A	25mm ²	60-101A	400V	187	31.2	6.5	3.8	16.5	13.0	25.5	14.8
CS12X05A-B	6mm ²	5-32A	380V	115	18.8	3.3	2.6	10.0	8.0	15.0	8.8
CS12X15A-B	12mm ²	15-61A	400V	137	22.5	4.5	2.8	12.0	10.0	18.8	10.2
CS12X30A-B	16mm ²	30-76A	400V	165	25.5	5.5	3.0	14.0	11.0	19.8	11.2
CS12X60A-B	25mm ²	60-101A	400V	187	31.2	6.5	3.8	16.5	13.0	25.5	14.8

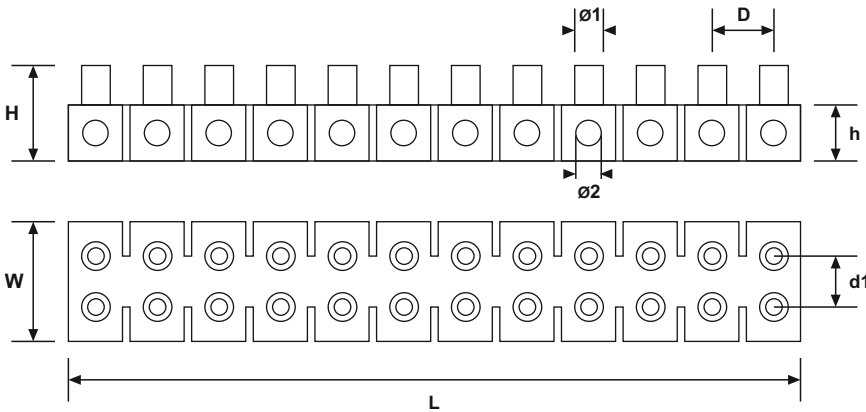

Cable Preparation Tooling

ECT1 - Multi-purpose tool to cut, strip and crimp

Wire stripper for 0.75 to 6.0mm² c/w wire cutter option
Bolt cutter for M2.6, M3, M3.5, M4 and M5
Crimps pre-insulated and non-insulated terminals 1.5 to 6.0mm²



ECT1

Length : 240mm
Weight : 0.4kgs

EWS6 - Wire stripper

Strip and cut wire 0.15 to 6.0mm²
Crimps pre-insulated and non-insulated terminals 1.5 to 6.0mm²
Robust metal construction and easy grip handle



EWS6

Length : 205mm
Weight : 0.25kgs

ECC38 - Light duty cable cutter up to 38mm²

Suitable for copper and aluminium cable up to 38mm²
The blade design ensures a clean cut without distortion
Easy grip, soft-feel insulated handles.



ECC38

Length : 205mm
Weight : 0.3kgs

ECC80 - Medium duty cable cutter up to 80mm²

Suitable for copper and aluminium non-armoured cable
The precision blade design ensures a clean cut
Easy grip, cushioned handles to reduce operator fatigue



ECC80

Length : 320mm
Weight : 0.75kgs

ECC250 - Heavy duty cable cutter up to 250mm²

Suitable for copper and aluminium non-armoured cable
The precision blade design ensures a clean cut
Extra long handles to reduce operator effort and fatigue



ECC250

Length : 600mm
Weight : 1.6kgs

Technical Datasheet



Material

Polyethylene
Brass insert connectors
Galvanised steel captive screws

Operating temperature

-15°C to +80°C

Standard

CE

Colours

Black or Natural

Pack size

1 x 12 way strip