


c **PANDUIT US Flat Cable Clips**



- Use with any width flat cable for a maximum stack height of 0.17 inches (4.3mm)
- Low profile design holds wires, cables, and tubing
- For indoor use only
- Material: PVC

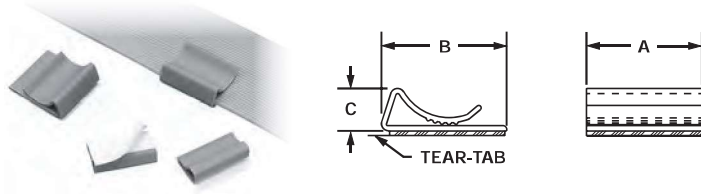

| Part Number | Cable Width | Length A | | Width B | | Height C | | Color | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|----------------------|----------|------|---------|------|----------|-----|-------|-----------------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | | | | |
| FCC5-A-C8 | Any width flat cable | 1.00 | 25.4 | 0.56 | 14.2 | 0.29 | 7.4 | Gray | Rubber | 100 | 1000 |
| FCC-A-C8 | | 1.00 | 25.4 | 1.09 | 27.7 | 0.38 | 9.7 | | | | |

Pan-Clamp™ Heavy Duty Fixed Diameter Clamps

- One-piece design significantly reduces installation time
- Integrated ribs prevent rotation of cable bundles and ensures secure grip on hoses
- Material: Impact modified Weather Resistant Nylon 6.6



| Part Number | Max. Bundle Diameter A | | Width B | | Bundle Offset C | | Max. Panel Thickness | | Panel Hole Diameter | | Color | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------|------------------------|------|---------|------|-----------------|------|----------------------|-----|---------------------|-----|-------|----------------|----------------|
| | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | | |
| PC038-H25D-C0 | 0.38 | 9.5 | 0.62 | 15.7 | 0.64 | 16.3 | 0.13 | 3.2 | 0.28 | 7.1 | Black | 100 | 500 |
| PC050-H25D-C0 | 0.50 | 12.7 | 0.62 | 15.7 | 0.71 | 17.9 | 0.13 | 3.2 | 0.28 | 7.1 | | | |
| PC062-H25D-C0 | 0.63 | 15.8 | 0.62 | 15.7 | 0.77 | 19.5 | 0.13 | 3.2 | 0.28 | 7.1 | | | |
| PC075-H25D-C0 | 0.75 | 19.1 | 0.62 | 15.7 | 0.83 | 21.1 | 0.13 | 3.2 | 0.28 | 7.1 | | 100 | 1000 |
| PC087-H25D-C0 | 0.88 | 22.1 | 0.62 | 15.7 | 0.89 | 22.7 | 0.13 | 3.2 | 0.28 | 7.1 | | | |
| PC100-H25D-C0 | 1.00 | 25.4 | 0.62 | 15.7 | 0.96 | 24.3 | 0.13 | 3.2 | 0.28 | 7.1 | | | |
| PC112-H25D-C0 | 1.13 | 28.5 | 0.62 | 15.7 | 1.02 | 25.8 | 0.13 | 3.2 | 0.28 | 7.1 | | | |
| PC125-H25D-C0 | 1.25 | 31.8 | 0.62 | 15.7 | 1.08 | 27.4 | 0.13 | 3.2 | 0.28 | 7.1 | | | |