

# MG-TDM

## THERMAL TRANSFER SYSTEM FOR SHEET MEDIA


### Cable tags without holder

*one piece, push on*

MG-TDM one piece tags require no transparent holders and are mounted on cables via the two range-taking apertures.

Tags are easily removed from the stems and partially printed sheets may be reused to avoid wastage.

- It is advisable to select the tag based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

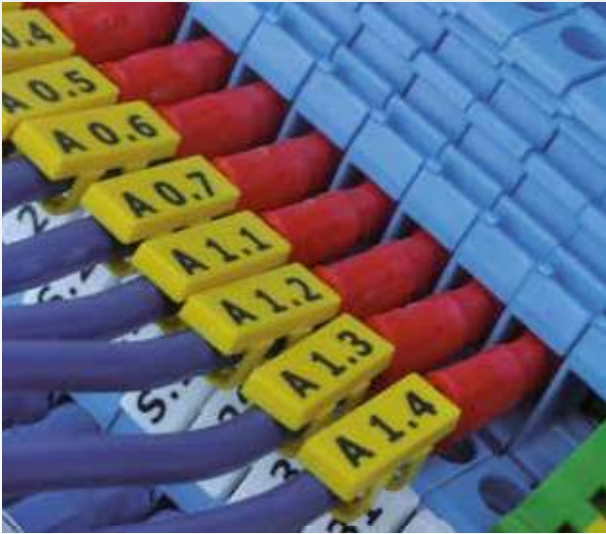

**Material:** Polycarbonate, Halogen Free, self extinguishing class V0: UL94.

**Operating temperature range:** -40°C (-40°F) to +130°C (+266°F)

PC HF SF -40°C +130°C

UL94 V0 RoHS COMPLIANT 2011/65/EU

Family	Cable ext. Ø range mm	Cable c.s.a range mm <sup>2</sup>	Size mm	Type		N° Stems	Tags per sheet	Quantity	Template	SW code
				white	yellow					
MG-TDM-01	1,6 ÷ 3,25	0,5 ÷ 1,5	4 x 12	40190	40140	6	66	1.320	991007	121
	1,6 ÷ 3,25	0,5 ÷ 1,5		40192	40142	4	40	800	991010	119
	1,6 ÷ 3,25	0,5 ÷ 1,5		40191	40141	4	40	800	991010	123
MG-TDM-02	2 ÷ 4,4	1 ÷ 6	4 x 12	40290	40240	6	66	1.056	991007	122
	2 ÷ 4,4	1 ÷ 6		40292	40242	4	40	640	991010	120
	2 ÷ 4,4	1 ÷ 6		40291	40241	4	40	640	991010	124



Directly on cables according to the diameter ranges shown in the table.  
No transparent holders required.

**PURCHASE SEPARATELY**

templates and PET supports..... page 10  
ribbons..... page 11