

Part number

# PEW 6364 PV



Mobile socket outlet, PLUSO series, 3 poles + PE, 6 h (red), 63 A, 380 ÷ 415 V

| Product description                           |   | Material properties          |   |
|---|---|------------------------------|---|
| <b>Product type</b>                           | Socket<br>Mobile  | <b>Colour</b>                | RAL 7035 grey, RAL 3000 red   |
| <b>Series</b>                                 | PEW...PV, PLUSO   | <b>RoHs conformity</b>       | Compliant with exemption<br>6(c): copper alloy containing up to 4% lead by weight |
| <b>N. of poles</b>                            | 3 poles +  | <b>China RoHs - EFUP</b>     | 50  |
| <b>Clock position</b>                         | 6   | <b>REACH SVHC substances</b> | Yes<br>Lead   |
| Technical data                                |   | <b>SCIP number</b>           | Ca7de37f-add8-4b77-9861-279c94903ade  |
| <b>Current</b>                                | 63 A  | Approvals / Standards        |   |
| <b>Voltage</b>                                | 380 ÷ 415 V   | <b>Reference standard</b>    | EN 60309-1 and -2   |
| <b>IP degree of protection</b>                | IP67  | General ordering information |   |
| Further technical details                     |   | <b>EAN13 code</b>            | 8015747077507   |
| <b>Weight</b>                                 | 915,00 g  | Packaging Information        |   |
| <b>Operating temperature range (min, max)</b> | -25°C ... +40°C   | <b>Packaging weight</b>      | 1,92 kg   |
|   |   | <b>Packaging volume</b>      | 6,61 dm <sup>3</sup>  |
|   |   | <b>Packaging description</b> | Carton box  |
|   |   | <b>Packaging quantity</b>    | 2 Pcs   |
|   |   | <b>Packaging EAN code</b>    | 8015747077514   |


Part number

# PEW 6364 PV



## Catalogue drawings

(63 / 125A) PEW ... PV

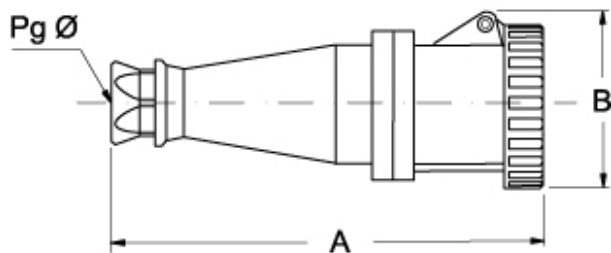

| PEW ... PV  |        | A   | B     | Pg Ø   |
|-------------|--------|-----|-------|--------|
| <b>63A</b>  | 2P+⊕   | 277 | 108,5 | 36     |
|             | 3P+⊕   | 277 | 108,5 | 36     |
|             | 3P+N+⊕ | 277 | 108,5 | 36     |
| <b>125A</b> | 2P+⊕   | 324 | 120,5 | 2" gas |
|             | 3P+⊕   | 324 | 120,5 | 2" gas |
|             | 3P+N+⊕ | 324 | 120,5 | 2" gas |

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...PV)