



T1-E

DUCT SERIES

Material: Rigid PVC, self extinguishing
Colour: Grey RAL 7030
Standard Length: 2 metres
Standard Unit Supplied:
 Duct complete with cover



T1-EF

DUCT SERIES

Material: Rigid PVC, self extinguishing
Colour: Grey RAL 7030
Standard Length: 2 metres
Standard Unit Supplied:
 Duct complete with cover




| Name | Dimensions (mm) | | | | | Section mm ² | Packaging metres |
|---------------|-----------------|----|---|---|----|-------------------------|------------------|
| | B | H | E | F | G | | |
| T1-E 25x40 G | 25 | 40 | 4 | 6 | 12 | 820 | 72 |
| T1-E 40x40 G | 40 | 40 | 4 | 6 | 12 | 1360 | 40 |
| T1-E 60x40 G | 60 | 40 | 4 | 6 | 12 | 1970 | 24 |
| T1-E 80x40 G | 80 | 40 | 4 | 6 | 12 | 2680 | 24 |
| T1-E 100x40 G | 100 | 40 | 4 | 6 | 12 | 3380 | 16 |
| T1-E 25x60 G | 25 | 60 | 4 | 6 | 14 | 1190 | 48 |
| T1-E 40x60 G | 40 | 60 | 4 | 6 | 14 | 2040 | 36 |
| T1-E 60x60 G | 60 | 60 | 4 | 6 | 14 | 3080 | 24 |
| T1-E 80x60 G | 80 | 60 | 4 | 6 | 14 | 4150 | 24 |
| T1-E 100x60 G | 100 | 60 | 4 | 6 | 14 | 5250 | 16 |
| T1-E 120x60 G | 120 | 60 | 4 | 6 | 14 | 6300 | 16 |

G = GREY RAL 7030


| Name | Dimensions (mm) | | | | | Section mm ² | Packaging metres |
|-----------------|-----------------|-----|---|---|----|-------------------------|------------------|
| | B | H | E | F | G | | |
| T1-EF 25x80 G | 25 | 80 | 4 | 6 | 16 | 1550 | 48 |
| T1-EF 40x80 G | 40 | 80 | 4 | 6 | 16 | 2700 | 32 |
| T1-EF 60x80 G | 60 | 80 | 4 | 6 | 16 | 4140 | 24 |
| T1-EF 80x80 G | 80 | 80 | 4 | 6 | 16 | 5660 | 24 |
| T1-EF 100x80 G | 100 | 80 | 4 | 6 | 16 | 7150 | 16 |
| T1-EF 120x80 G | 120 | 80 | 4 | 6 | 16 | 8630 | 16 |
| T1-EF 25x100 G | 25 | 100 | 4 | 6 | 18 | 2300 | 16 |
| T1-EF 100x100 G | 100 | 100 | 4 | 6 | 18 | 8920 | 8 |

G = GREY RAL 7030

This duct is ideal for small sized wires commonly employed in electric and electronic control panels. This duct with restricted slot opening is strong and robust due to its thick base and side construction. Perfect solidity is also guaranteed in cantilevered applications. Made of a material with more than 3000 NPa modulus of elasticity, it allows for repeated opening and closing of the duct fingers during wiring operations even at low temperature, without breaking. Maximum accuracy and standardization in series installations is achieved due to close design tolerance.

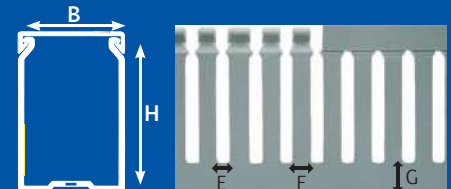

T1/T1-E/T1-F/T1-EF - BOTTOM PERFORATION

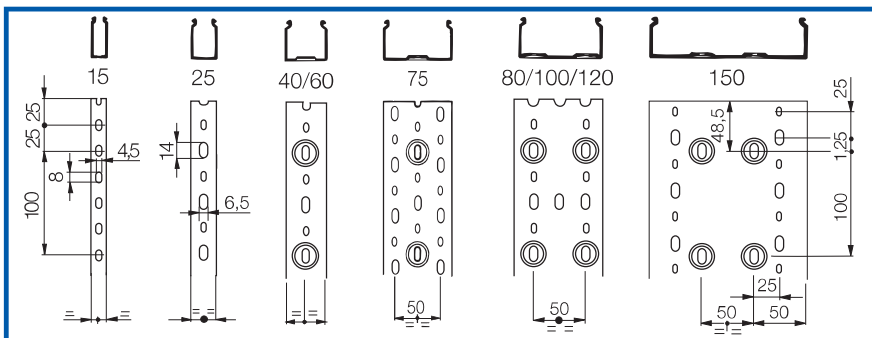

Duct bottom perforation according to DIN 43659

The bottom perforation of the cable duct series T1 and T1-E allows mounting on the panel with DUCTAFIX R6 or R4 or on DIN rails.

The recess bosses in the base of duct series T1 and T1-E allow rapid mounting of components CL, ZP2 and SEP-E inside the cable duct.

Two predetermined break lines:
 - for breaking off and removal of sidewall finger segments only.
 - for removal of sidewall finger and base segments.



Patented recess boss for rapid mounting of components.