


Part number

# PEW 12565 PV



Mobile socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 125 A, 380 ÷ 415 V

## Product description

<b>Product type</b>	Socket Mobile
<b>Series</b>	PEW...PV, PLUSO
<b>Connection type</b>	Screw terminal connection
<b>N. of poles</b>	3 poles + N + 
<b>Clock position</b>	6

## Technical data

<b>Current</b>	125 A
<b>Voltage</b>	380 ÷ 415 V
<b>IP degree of protection</b>	IP67

## Further technical details

<b>Weight</b>	1.994,00 g
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C

## Material properties

<b>Colour</b>	RAL 7035 grey, RAL 3000 red
<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>China RoHs - EFUP</b>	50
<b>REACH SVHC substances</b>	Yes Lead
<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade

## Approvals / Standards

<b>Reference standard</b>	EN 60309-1 and -2
---------------------------	-------------------

## General ordering information

<b>EAN13 code</b>	8015747070591
-------------------	---------------

## Packaging Information

<b>Packaging length</b>	330,00 mm
<b>Packaging height</b>	170,00 mm
<b>Packaging width</b>	230,00 mm
<b>Packaging weight</b>	4,47 kg
<b>Packaging volume</b>	12,90 dm <sup>3</sup>
<b>Packaging description</b>	Carton box
<b>Packaging quantity</b>	2 Pcs
<b>Packaging EAN code</b>	8015747192842
<b>Sub-packaging weight</b>	2,24 kg
<b>Sub-packaging description</b>	Plastic packaging
<b>Sub-packaging quantity</b>	1 Pcs
<b>Sub-packaging EAN barcode</b>	8015747070614


Part number

# PEW 12565 PV



## Catalogue drawings

(63 / 125A) PEW ... PV

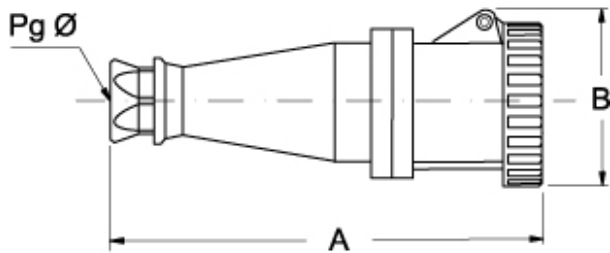

PEW ... PV		A	B	Pg Ø
<b>63A</b>	2P+⊕	277	108,5	36
	3P+⊕	277	108,5	36
	3P+N+⊕	277	108,5	36
<b>125A</b>	2P+⊕	324	120,5	2" gas
	3P+⊕	324	120,5	2" gas
	3P+N+⊕	324	120,5	2" gas

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...PV)