

FLEXIBLE CONDUITS

TYPE KCC

CONSTRUCTION

PVC CORRUGATED CONDUIT

RATING

IP 54

TEMPERATURE

-5°C to +70°C

COLOUR

BLACK AND WHITE (OTHERS ON REQUEST)

PVC CORRUGATED CONDUIT

TYPE KCC



PART NO.	OUTSIDE DIA.	INSIDE DIA.	MINIMUM INSIDE BEND RADIUS	REELED LENGTH (m)
KCC 16-100 Black	16	11	24	100
KCC 20-100 Black	20	14	32	100
KCC 25-50 Black	25	18	40	50
KCC 32-25 Black	32	24	56	25
KCC 40-25 Black	40	31	64	25
KCC 50-25 Black	50	40	100	25

FITTINGS FOR KCC CONDUIT

TYPE KNCF

STRAIGHT FITTING



ISO	PART NO.	PG
KNCF16 M16 Black	KNCF16 PG11 Black	
KNCF20 M20 Black	KNCF20 PG13,5 Black	
-	KNCF20 PG16 Black	
KNCF25 M25 Black	KNCF25 PG21 Black	
KNCF32 M32 Black	KNCF32 PG29 Black	
KNCF40 M40 Black	KNCF40 PG36 Black	
KNCF50 M50 Black	KNCF50 PG42 Black	

TYPE KNCF


90° FITTING



ISO	PART NO.	PG
KNCF16 M16-90 Black	KNCF16 PG11-90 Black	
KNCF20 M20-90 Black	KNCF20 PG13,5-90 Black	
-	KNCF20 PG16-90 Black	
KNCF25 M25-90 Black	KNCF25 PG21-90 Black	
KNCF32 M32-90 Black	KNCF32 PG29-90 Black	
KNCF40 M40-90 Black	-	
KNCF50 M50-90 Black	-	

PVC CORRUGATED CONDUIT

TYPE KCC

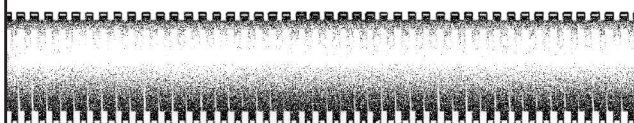


PART NO.	OUTSIDE DIA.	INSIDE DIA.	MINIMUM INSIDE BEND RADIUS	REELED LENGTH (m)
KCC 16-100 White	16	11	24	100
KCC 20-100 White	20	14	32	100
KCC 25-50 White	25	18	40	50
KCC 32-25 White	32	24	56	25
KCC 40-25 White	40	31	64	25
KCC 50-25 White	50	40	100	25

FITTINGS FOR KCC CONDUIT

TYPE KNCF

STRAIGHT FITTING



ISO	PART NO.	PG
KNCF16 M16 White	KNCF16 PG11 White	
KNCF20 M20 White	KNCF20 PG13,5 White	
-	KNCF20 PG16 White	
KNCF25 M25 White	KNCF25 PG21 White	
KNCF32 M32 White	KNCF32 PG29 White	
KNCF40 M40 White	-	
KNCF50 M50 White	-	

TYPE KNCF

90° FITTING



ISO	PART NO.	PG
KNCF16 M16-90 White	KNCF16 PG11-90 White	
KNCF20 M20-90 White	KNCF20 PG13,5-90 White	
-	KNCF20 PG16-90 White	
KNCF25 M25-90 White	KNCF25 PG21-90 White	
KNCF32 M32-90 White	KNCF32 PG29-90 White	
KNCF40 M40-90 White	-	
KNCF50 M50-90 White	-	