


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO	MAX. BUNDLE DIA	PACKAGE QTY	"L" LENGTH +/- .3 [7]
MLT4DEH15-Q316	4" [102]	25	29.5" [749]
MLT6DEH15-Q316	6" [152]	25	41.5" [1054]
MLT8DEH15-Q316	8" [203]	25	53.5" [1359]

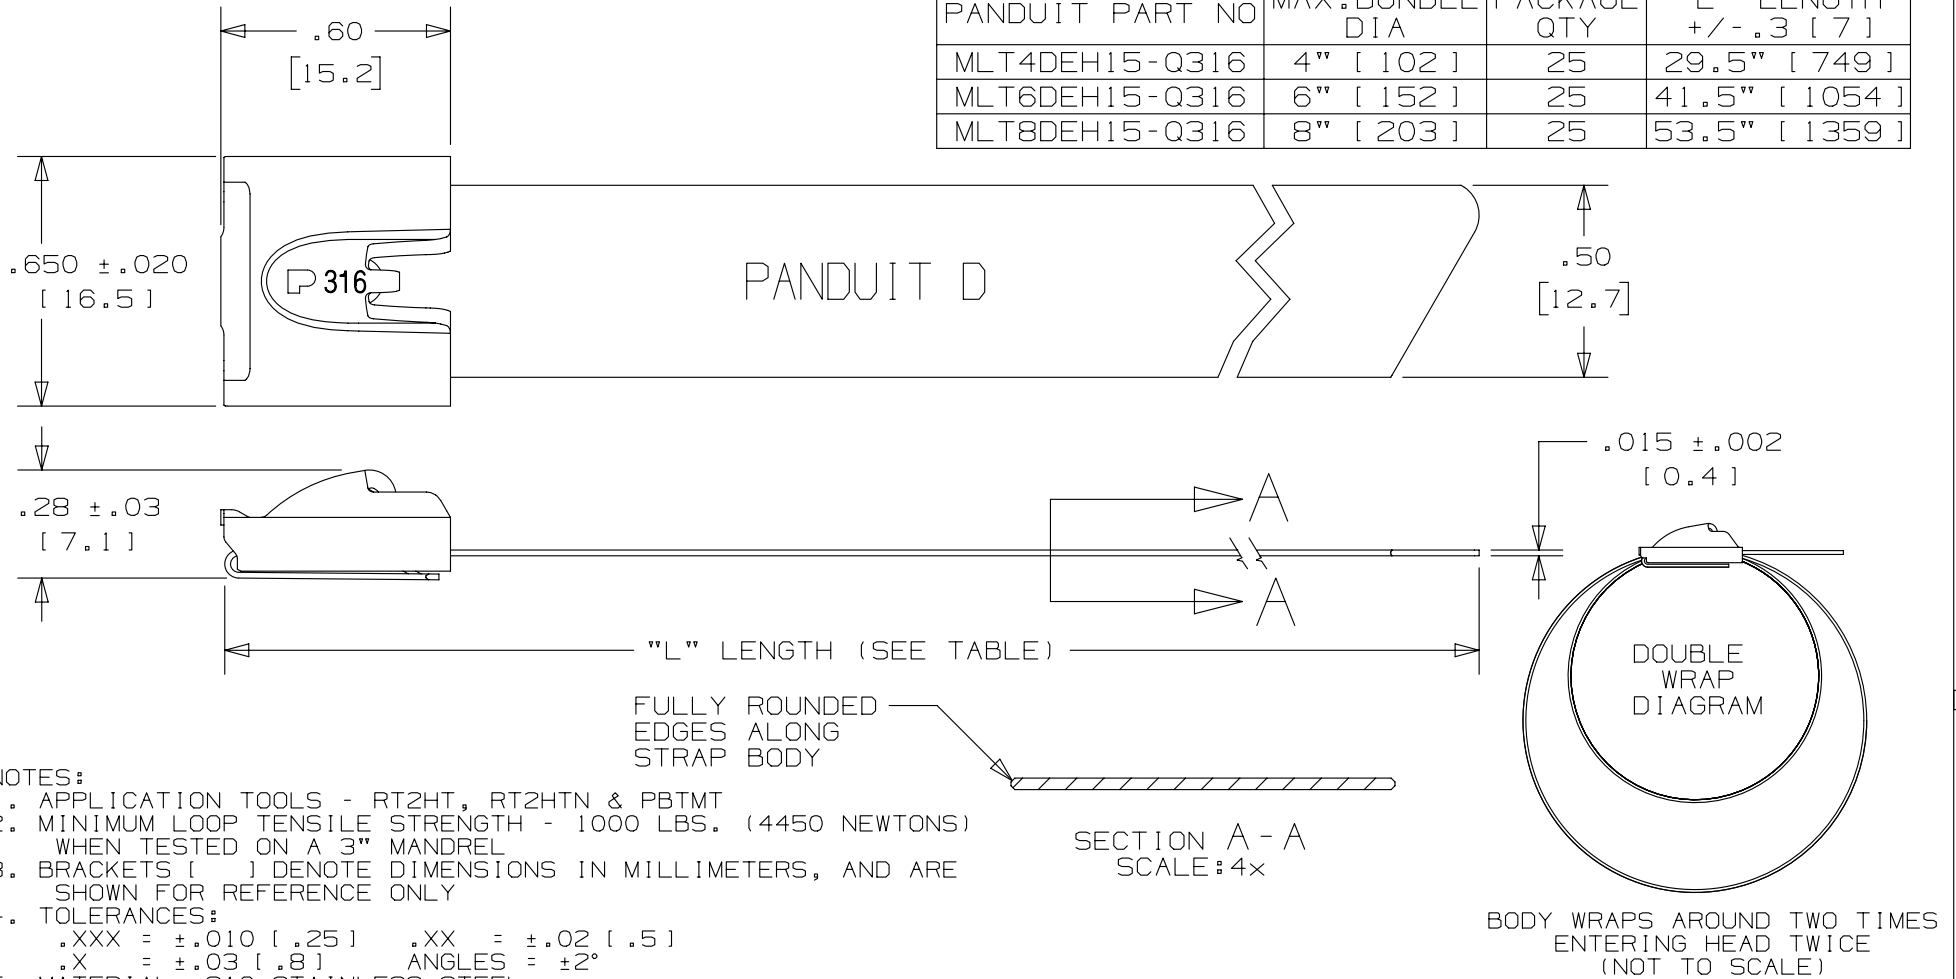

- NOTES:
1. APPLICATION TOOLS - RT2HT, RT2HTN & PBTMT
 2. MINIMUM LOOP TENSILE STRENGTH - 1000 LBS. (4450 NEWTONS) WHEN TESTED ON A 3" MANDREL
 3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
 5. MATERIAL: 316 STAINLESS STEEL

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	02/13	JAMB	SKB	RGRO	REMOVED APPLICATION TOOL ST3MT, AND ADDED RT2HTN AND PBTMT	SSECN01028
02A	02/12	MIM	RGRO	---	UPDATE DRAWING TO NEW PANDUIT GLOBAL TITLE BLOCK WITH PANDUIT LOGO	-----
01A	10/08	JAMB	SKB	---	NOTE 3: METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----
01	08/04	JAMB	EJD	JJB	ORIG CAD FILE SPEC WAS S41162_01. NOTE 1: APPLICATION TOOL RT1HT REPLACED BY RT2HT	11907
00	01/04	JAMB	DPN	JJB	REMOVED "AISI NO.5"	11307
00	01/04	JAMB	DPN	JJB	DRAWING RELEASED	11307

TITLE						
METAL LOCKING TIE EXTRA HEAVY DUTY 316 STAINLESS STEEL DOUBLE WRAP						
CUSTOMER DRAWING						
ITEM REVISION NAME		N41162BS/03			PANDUIT	
DATASET FILE NAME		N41162BS_DC/03A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					MATERIAL:	
.x ± .1 [2.54] .xxx ± .005 [0.127] .xx ± .01 [.25] ANGLES ± 5°					SEE NOTES	
					DRAWING NUMBER:	
					N41162BS_DC	
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1		
JAMB	DPN	JJB	2:1	A		