



DBL POWER DISTRIBUTION BLOCKS

Screw clamp technology

1000 V AC / 1500 V DC (IEC) - 1000 V (UL), from 80 to 550 A

ENTRELEC Terminal Blocks

The compact and modular design of our power distribution blocks allows easy installation combined with a great flexibility of use.



EASY TO INSTALL

3 configurations in 1 product:

- **Single pole splitter:** split of power main input into several outputs.
- **Multiple poles splitter:** interlocking function and ready to use marking kit (L1, L2, L3, N, PE, +, -) delivered with each block.
- **Grouping** of several inputs into 1 output (solar application).

Flexible cover facilitates identification & wiring:

- Reversible, two directions opening, snap-on.
- All wiring data and specifications visible on top.



SPACE SAVING

Panel space saving:

Save up to 50 % rail space compared to conventional distribution bars thanks to our modular compact design.

1 500 V DC:

Voltage rating adapted to most recent solar inverters requirements.



INCREASED PRODUCTIVITY

Reduced wiring, inventories, hardware and assembly costs:

- Reduce assembly time by 80 % compared to conventional systems.
- Our modular and touch proof concept significantly reduces the needs for bus bars, isolators, fasteners, protection screens...
- Accept **aluminum & copper** conductors.
- 1 product in stock for **3 possible** configurations.



DBL Power distribution blocks

Screw clamp technology

Single pole

DBL80

7 connections



DBL125

8 connections



DBL160

8 connections



DBL175

12 connections



DBL250 and DBL400

12 connections



Solar

DBL400-PV

14 connections



Three poles

DBL125-3 and DBL175-C-3

8x3 connections



Flat conductor

DBL250-F and DBL500-F


7 and 12 connections



2 inputs / 2 outputs

DBL500-22

4 connections

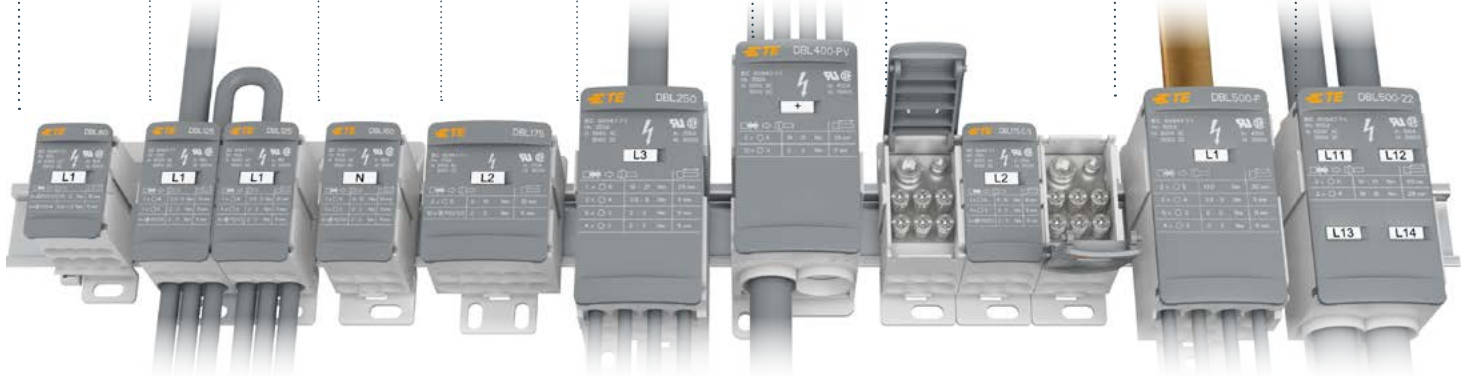

Type	Part number	Pkg	Max current		Connection capacity			Max cross section									
			IEC	UL / CSA	Cable diameter Ø			Flexible with insulated ferrule			Rigid Solid			Rigid Stranded			
					nb	mm	in	mm ²	AWG	mm ²	AWG	mm ²	AWG	mm ²	AWG		
	DBL80	1	Cu: 80 A Al: 63 A	Cu: 80 A	3	6.6	0.26	2.5 ... 16	14 ... 6	2.5 ... 16	14 ... 4	2.5 ... 16	14 ... 4	2.5 ... 16	14 ... 4	2.5 ... 16	14 ... 10
	DBL125	1	Cu: 125 A Al: 100 A	Cu: 115 A	1	9.8	0.386	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2
	DBL125-3	1	Cu: 125 A Al: 100 A	Cu: 115 A	3x1	9.8	0.386	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2	10 ... 35	8 ... 2
	DBL160	1	Cu: 160 A Al: 135 A	Cu: 160 A	1	11.8	0.465	16 ... 50	6 ... 1/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0
	DBL175	1	Cu: 175 A Al: 135 A	Cu: 175 A	2	11.8	0.465	10 ... 50	8 ... 1/0	10 ... 70	6 ... 2/0	10 ... 70	6 ... 2/0	10 ... 70	6 ... 2/0	10 ... 70	6 ... 2/0
	DBL175-C-3	1	Cu: 175 A Al: 135 A	Cu: 175 A	3x1	11.8	0.465	16 ... 50	8 ... 1/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0	16 ... 70	6 ... 2/0
	DBL250	1	Cu: 250 A Al: 200 A	Cu: 255 A	1	15.3	0.602	35 ... 95	2 ... 3/0	35 ... 120	2 ... 250 kcmil	35 ... 120	2 ... 250 kcmil	35 ... 120	2 ... 250 kcmil	35 ... 120	2 ... 250 kcmil
	DBL250-F	1	Flexible bars: 250 A Solid bars: 208 A	Flexible bars: 250 A Solid bars: 160 A	1	15.5 x 7.5	0.59 x 0.28	Flexible bars: 3 x 9 x 0.8 mm ... 6 x 15.5 x 0.8 mm Solid bars: 12 x 4 mm									
	DBL400	1	Cu: 400 A Al: 300 A	Cu: 335 A	1	18.8	0.74	95 ... 150	3/0 ... 300 kcmil	95 ... 185	3/0 ... 400 kcmil	95 ... 185	3/0 ... 400 kcmil	95 ... 185	3/0 ... 400 kcmil	95 ... 185	3/0 ... 400 kcmil
	DBL400-PV	1	Cu: 550 A	Cu: 400 A	2	15.5	0.59	2.5...95	4...3/0	25...120	4...250 kcmil	25...120	4...250 kcmil	25...120	4...250 kcmil	25...120	4...250 kcmil
	DBL500-22	1	Cu: 500 A	Cu: 510 A	2	15.5	0.61	25 ... 95	4 ... 3/0	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil	25 ... 120	4 ... 250 kcmil
	DBL500-F	1	Flexible bars: 500 A Solid bars: 500 A	Flexible bars: 420 A Solid bars: 420 A	1	26 x 10.8	1.02 x 0.4	Flexible bars: 3 x 9 x 0.8 mm ... 10 x 24 x 1 mm Solid bars: 12 x 4 mm ... (2x) 25 x 5 mm									

Rated voltage 1000 V AC, 1500 V DC (IEC) / 1000 V AC/DC (UL/CSA).

Flexible without ferrule (IEC V-K & UL: class 5/6)	Flexible with insulated ferrule (IEC V-K & UL: class 5/6)	Rigid Solid (IEC V-U class 1, UL solid)	Rigid Stranded (IEC V-R class 2, UL class B/C)
--	---	---	--

te.com

© 2022 TE Connectivity Ltd. family of companies. All Rights Reserved.

ENTRELEC, TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE reserves the right to make any changes to the information contained herein without prior notice. Information contained herein are for reference purposes only and TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. TE assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. Consult TE for the latest dimensions and design specifications.

TE Connectivity
3, rue Jean Perrin
69687 Chassieu cedex
France
Tel: +33 481923100