


MG-17.5

Modular backing strips

15 mm, precut


The backing strips are ideal for modular components to achieve a perfect alignment of MG-17.5 legends in up to 430 mm long strips, to be applied directly on the panel or in mounting rails.

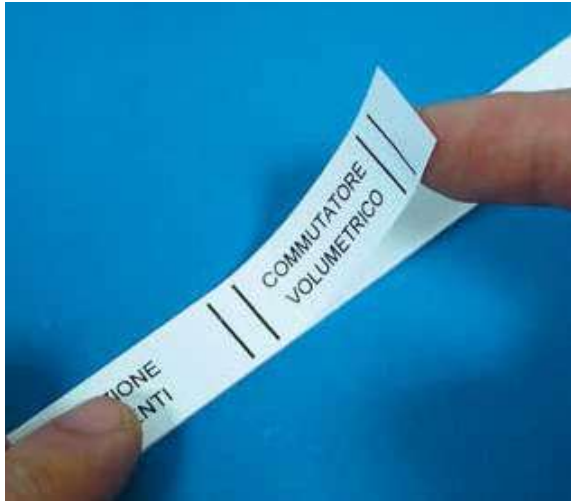

Material: PVC film

Operating temperature range: -30°C to +70°C


Application temperature range: +10°C to +40°C

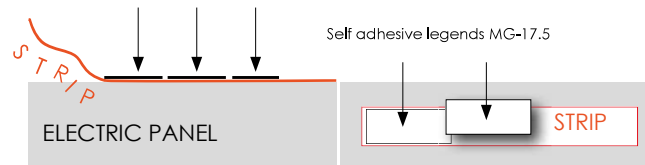

PVC 0.1mm SF -30°C +70°C



self adhesive	Size mm	Type		Thickness mm	Quantity
		white	yellow		
✓	15 x 430	990752	990756	0,1	10

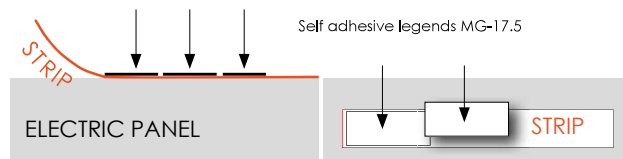

Material: Rigid PVC, self extinguishing class V0: according to UL94

Operating temperature range: -30°C to +60°C


Application temperature range: +10°C to +40°C

PVC 0.7mm SF -30°C +60°C



self adhesive	Size mm	Type		Thickness mm	Quantity
		white	yellow		
✓	15 x 430	990759	990760	0,7	10

Self adhesive rail RTA-TAP Self adhesive labels MG-17.5

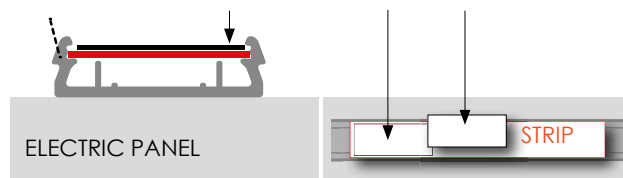

Material: Rigid PVC, self extinguishing class V0: according to UL94

Operating temperature range: -30°C to +60°C

Application temperature range: +10°C to +40°C

PVC 0.5mm SF -30°C +60°C



Size mm	Type		Thickness mm	Quantity
	white	yellow		
15 x 430	990757	990758	0,5	10



Directly on the panel.

modular legends MG-17.5..... page 45
modular labels MG-17.5..... page 46
rails RT-TAP page 142

