

# DN-A

## FLEXIBLE DUCTS

**Material:** Polypropylene  
self-extinguishing, non-toxic  
**Colour:** Grey RAL 7030, White  
**Standard length:** 0,5 metres



Applicable to white DN-A only

For all applications where one does not want to provide mounting holes. For wiring to cabinet doors, from control panels and for electronic equipment.

For that part of the cable run that leans against the side of the control cabinet.

For containing wires in variable direction ensuring the flexibility of the wiring run.


Available in four sizes with adhesive tape.

- Due to the flexibility of the material individual wires can easily be added, or removed from total wires within the duct.
- Since DN-A has no cover it can accommodate cables in restricted space applications, and also effectively removes the need for cable ties.
- It can be used in extreme operating conditions (i.e. max. temp. up to 80°C).
- DN-A withstands mechanical stress when installed. While in the event of fire does not emit corrosive, nor toxic gases, and smoke development is minimal.
- The duct can be cut to desired length using scissors or knife.

When applying the DN-A with adhesive tape, (DN-A 10, DN-A 20, DN-A 30, DN-A 40) it is necessary to make sure that the surface is perfectly clean and dry.


| Name      | Dimensions millimeter | Section mm <sup>2</sup> | Packaging pieces |
|-----------|-----------------------|-------------------------|------------------|
| DN-A 10 G | 13x15                 | 100                     | 42               |
| DN-A 20 G | 20x24                 | 320                     | 16               |
| DN-A 30 G | 30x33                 | 620                     | 12               |
| DN-A 40 G | 40x44                 | 1220                    | 8                |

G = GREY RAL 7030

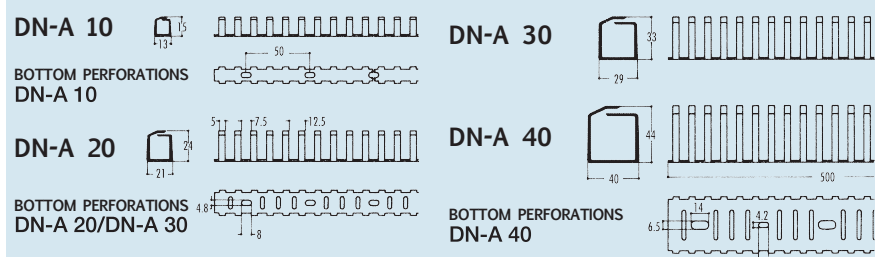

| Name    | Dimensions millimeter | Section mm <sup>2</sup> | Packaging pieces |
|---------|-----------------------|-------------------------|------------------|
| DN-AS G | 17,5x28               | 275                     | 24               |
| DN-AM G | 32x43                 | 900                     | 24               |
| DN-AL G | 42,5x55               | 1550                    | 14               |

G = GREY RAL 7030



# DN-A

## FLEXIBLE DUCTS

**Material:** Talc reinforced polypropylene  
**Colour:** Grey RAL 7030  
**Standard length:** 0,5 metres



Especially designed for compact installations. The new design allows for easier inserting and removal of the wires.

