

Legends


precut

MG-TAR legends are often designed to fit particular components with a suitable clip in or stick on location.

Consult us for availability of other colors.

Note: UV resistance may vary between colors.

MG-TAR

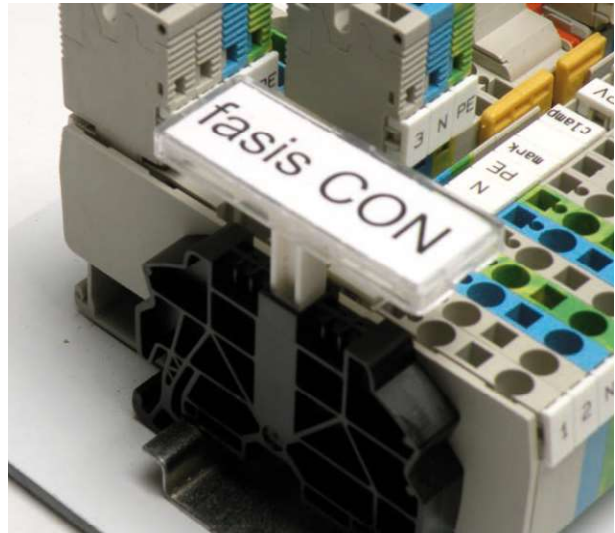

Material: Rigid PVC, self extinguishing class V0 according to UL94; the colors white PVC10050WH and yellow PVC10050YE are UL approved.

Operating temperature range: -22°F to +140°F

PVC
0.3mm
SF
-22°F
+140°F
RoHS COMPLIANT 2011/65/EU

Component	Size mm	Type white	Tags per sheet	Quantity	SW code
Jung	8 x 55	45089	24	1,200	719

PVC
0.5mm
SF
-22°F
+140°F
RoHS COMPLIANT 2011/65/EU

Component	Size mm	Type					Tags per sheet	Quantity	SW code
		white PVC10050WH	yellow PVC10050YE	grey	red	blue			
	4.6 x 17.5	45398					25	875	797
	6 x 60	45090					16	800	189
Weidmüller SCHAT7 & M8/30	6.3 x 30	45396					45	2,250	800
Phoenix Contact KLM-A	6.3 x 44	45394	45344	45384GY	45324	45364	30	750	798
Weidmüller SCHAT5S, Beckhoff I/O	7.5 x 40	45098	45048				24	1,200	801
Entrelec SNK LH	8.5 x 30	45490					33	1,650	720
Wago 249-119	10 x 28.5	45395					27	1,350	350
Reyrolle ER231	10.4 x 21	45297					50	1,250	351
CZ Explosion proof 4031/4	12 x 57.5	45392					16	800	708
	14 x 45.5	45390					14	700	718
	14 x 84	45192	45142				6	300	805
Entrelec PEB	17 x 35	45194	45144				18	900	711
Weidmüller SCHAT5	17 x 40	45094N	45044N			45064N	18	900	713
	17 x 44	45195	45145				12	600	717
	17 x 140	45491					6	300	839
CZ Explosion proof 4031/4	17.5 x 36	45391					18	900	709
	26 x 46	45397					8	400	750
	40 x 140	45492					2	100	877



Directly to suitable clip in or stick on locations

template with PET support..... page 10
ribbons page 11

