

Part number

PEW 12563 PV



Mobile socket outlet, PLUSO series, 2 poles + PE, 6 h (blue), 125 A, 200 ÷ 250 V

Product description

| | |
|-----------------------|------------------|
| Product type | Socket Mobile |
| Series | PEW...PV, PLUSO |
| N. of poles | 2 poles + |
| Clock position | 6 |

Technical data

| | |
|--------------------------------|-------------|
| Current | 125 A |
| Voltage | 200 ÷ 250 V |
| IP degree of protection | IP67 |

Further technical details

| | |
|---|-----------------|
| Weight | 1.700,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |

Material properties

| | |
|------------------------------|--|
| Colour | RAL 7035 grey, RAL 5015 blue |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747070249 |
|-------------------|---------------|

Packaging Information

| | |
|----------------------------------|-----------------------|
| Packaging length | 330,00 mm |
| Packaging height | 170,00 mm |
| Packaging width | 230,00 mm |
| Packaging weight | 3,66 kg |
| Packaging volume | 12,90 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 2 Pcs |
| Packaging EAN code | 8015747198974 |
| Sub-packaging weight | 1,83 kg |
| Sub-packaging description | Plastic packaging |
| Sub-packaging quantity | 1 Pcs |
| Sub-packaging EAN barcode | 8015747070263 |


Part number

PEW 12563 PV



Catalogue drawings

(63 / 125A) PEW ... PV

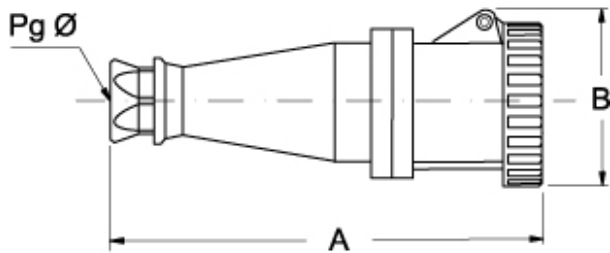

| PEW ... PV | | A | B | Pg Ø |
|-------------|--------|-----|-------|--------|
| 63A | 2P+⊕ | 277 | 108,5 | 36 |
| | 3P+⊕ | 277 | 108,5 | 36 |
| | 3P+N+⊕ | 277 | 108,5 | 36 |
| 125A | 2P+⊕ | 324 | 120,5 | 2" gas |
| | 3P+⊕ | 324 | 120,5 | 2" gas |
| | 3P+N+⊕ | 324 | 120,5 | 2" gas |

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...PV)