


Pan-Ty® Cable Ties – Weather Resistant Nylon 12



- For high moisture, corrosive (zinc chloride and dilute acids), and low temperature indoor or outdoor applications
- Cable tie of choice for making attachments to galvanized surfaces
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation




Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
Intermediate Cross Section													
PLT1.5I-M120	5.6	142	0.142	3.6	0.045	1.1	1.38	35	25	111	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	25000
Standard Cross Section													
PLT2S-M120	7.4	188	0.190	4.8	0.052	1.3	1.88	48	40	178	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	1000	10000
PLT4S-M120	14.5	368	0.190	4.8	0.052	1.3	4.00	102	40	178		1000	5000
Light-Heavy Cross Section (Straight Tip)													
PLT4H-TL120	14.5	368	0.300	7.6	0.075	1.9	4.00	102	90	400	GTH-E, GTSL, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500
PLT8LH-C120	27.6	701	0.300	7.6	0.075	1.9	8.00	203	90	400		100	2500

Pan-Ty® Cable Ties – Polypropylene – Distinctive Green Color



- For chemical resistance where high loop tensile strength is not required especially in the presence of hydrochloric acid, salts, and bases
- For indoor use
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

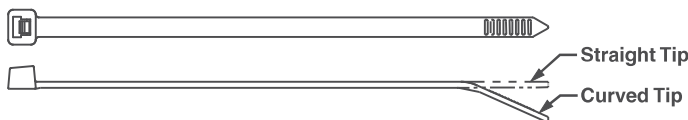

Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
Miniature Cross Section													
PLT1M-M109	3.9	99	0.098	2.5	0.043	1.1	0.87	22	11	49	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	50000
Intermediate Cross Section													
PLT1.5I-M109	5.6	142	0.142	3.6	0.045	1.1	1.38	35	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	25000
Standard Cross Section													
PLT2S-M109	7.4	188	0.190	4.8	0.052	1.3	1.88	48	30	133	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	1000	10000
PLT3S-M109	11.5	292	0.190	4.8	0.052	1.3	3.00	76					
PLT4S-M109	14.5	368	0.190	4.8	0.052	1.3	4.00	102				30	133
Light-Heavy Cross Section (Straight Tip)													
PLT2H-TL109	8.1	206	0.300	7.6	0.075	1.9	2.00	51	50	222	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500
PLT3H-TL109	11.4	290	0.300	7.6	0.075	1.9	3.00	76					
PLT4H-TL109	14.5	368	0.300	7.6	0.075	1.9	4.00	102					