


### UL US C SP US Pan-Ty® Cable Ties – Flame Retardant Nylon 6.6

- Flammability rating of UL 94V-0 – indoor use
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

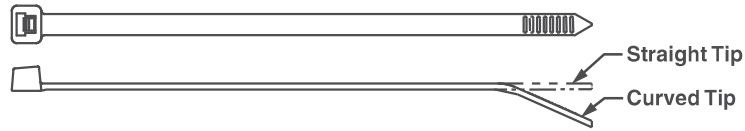


Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N			
<b>Miniature Cross Section</b>													
PLT1M-M60*	4.0	102	0.098	2.5	0.043	1.1	0.87	22	18	80	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	25000
PLT1M-M69													
PLT2M-M69	8.0	203	0.098	2.5	0.043	1.1	2.00	51					
<b>Intermediate Cross Section</b>													
PLT1.5I-M69	5.6	142	0.142	3.6	0.044	1.1	1.38	35	40	178	GTS-E, GS2B-E, PTS, PPTS, STS2	1000	25000
PLT2I-M69	8.0	203	0.142	3.6	0.044	1.1	2.00	51					
<b>Standard Cross Section</b>													
PLT2S-M60*	7.4	188	0.190	4.8	0.052	1.3	1.88	48	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2	1000	10000
PLT2S-M69													
PLT4S-M69	14.5	368	0.190	4.8	0.052	1.3	4.00	102	50	222			
<b>Light-Heavy Cross Section (Straight Tip)</b>													
PLT4H-TL69	14.6	371	0.300	7.6	0.075	1.9	4.00	102	120	534	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH	250	2500

\*Black flame retardant material (60).

### UL US LISTED Cable Tie Mounts – Flame Retardant Nylon 6.6

- Flammability rating of UL 94V-0 – indoor use
- Unique cradle design provides maximum stability for the cable bundle
- Low profile design keeps bundle close to mounting surface



Part Number	Used with Cable Ties*	Length A		Width B		Height C		Counterbore Diameter		Mounting Method	Std. Pkg. Qty.	Std. Ctn. Qty.
		In.	mm	In.	mm	In.	mm	Lbs.	N			
TM1S4-M69	M	0.51	13.0	0.32	8.0	0.23	5.8	0.23	5.7	#4 (M2.5) Screw	1000	5000
TM1S6-M69	M	0.51	13.0	0.32	8.0	0.23	5.8	0.28	7.0	#6 (M3) Screw		
TM2S6-M69	M, I, S	0.63	16.0	0.43	10.8	0.28	7.0	0.29	7.1	#6 (M3) Screw		
TM2S8-M69	M, I, S	0.63	16.0	0.43	10.8	0.28	7.0	0.33	8.4	#8 (M4) Screw		
TM3S8-C69	M, I, S, LH	0.86	21.9	0.61	15.5	0.37	9.4	0.32	8.1	#8 (M4) Screw	100	500
TM3S10-M69	M, I, S, LH	0.86	21.9	0.61	15.8	0.37	9.4	0.38	9.7	#10 (M5) Screw	1000	5000

\*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard and LH = Light-Heavy.

Order number of pieces required, in multiples of Standard Package Quantity.