


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE OF DWG PER ECO-19-004674	3/26/2019	I. MYONG

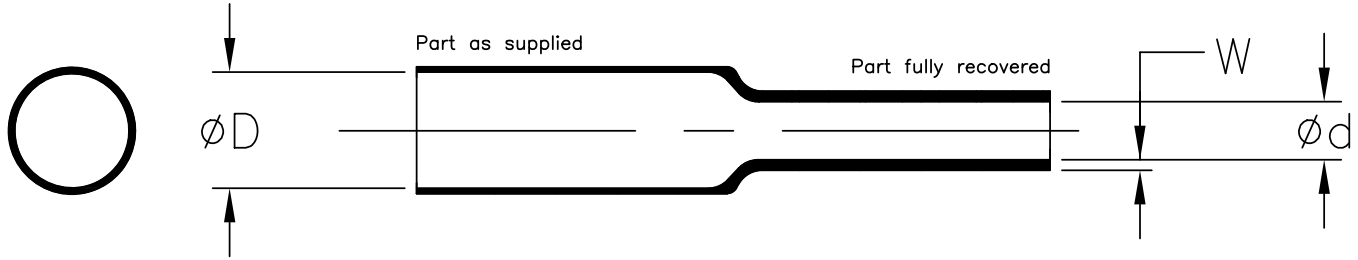

As Supplied			As Recovered							
Size	Inside Diameter 'D' Minimum		Inside Diameter 'd' Maximum		Wall Thickness					
	in.	mm.	in.	mm.	Minimum		Maximum		Nominal	
					in.	mm.	in.	mm.	in.	mm.
3.0/1.5	.118	3.0	.059	1.5	.024	0.60	.032	0.80	.028	0.70
5.0/2.5	.197	5.0	.098	2.5	.025	0.63	.035	0.87	.030	0.75
8.0/4.0	.315	8.0	.157	4.0	.025	0.65	.037	0.95	.031	0.80
12.0/6.0	.472	12.0	.236	6.0	.029	0.75	.041	1.05	.035	0.90
18.0/9.0	.709	18.0	.354	9.0	.032	0.82	.046	1.18	.039	1.00
24.0/12.0	.945	24.0	.472	12.0	.035	0.90	.051	1.30	.043	1.10
40.0/20.0	1.575	40.0	.787	20.0	.042	1.07	.060	1.53	.051	1.30
60.0/30.0	2.632	60.0	1.181	30.0	.048	1.22	.070	1.78	.059	1.50

**NOTES:**

1. THIS PRODUCT IS DESIGNED FOR A WIDE RANGE OF APPLICATIONS, AND MEETS THE PERFORMANCE REQUIREMENTS OF TE SPECIFICATION RT-1157.
2. PACKAGED AND SUPPLIED ON A SPOOL AND LABELED WITH (example: ZHTM 8/4-0), PART NUMBERING SYSTEM: ZHTM= PART NUMBER, 8/4= ORDER SIZE, -0= BLACK (STANDARD COLOR).
3. ALWAYS ORDER THE LARGEST SIZE THAT WILL SHRINK SNUGLY OVER THE COMPONENT TO BE COVERED.
4. FOR MATERIAL AND FINISH INFORMATION REFER TO RT-1157 SPECIFICATION. FOR SPECIAL ORDER SIZES, CONTACT TE CONNECTIVITY.

**Raychem Harness & Components CUSTOMER DRAWING**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. AND INCH DIMENSIONS ARE IN SHOWN IN (PARENTHESES).			
DECIMALS: .000 ± 0.000 .00 ± 0.00 .0 ± 0.0	ANGLES: ± 0° 00'		
TE CONNECTIVITY RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.		TITLE: ZHTM TUBING, HEAT SHRINKABLE FLEXIBLE, FLAME RETARDED LOW SMOKE, HALOGEN FREE	
		DRAWING NO: <b>ZHTM</b>	
DRAWN: 20Mar2019 G.Rositano	APPROVED: 22Mar2019 I.Myong	CAGE CODE 06090	CAD FILE: ZH150_cd
SIZE: A	SCALE: 1:1	THIRD ANGLE PROJ. 	SHEET: 1_OF_1