
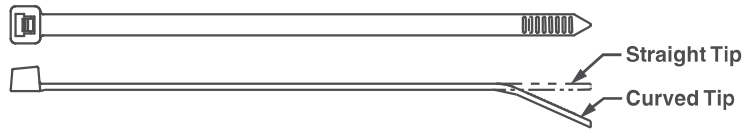



Pan-Ty® Cable Ties – Metal Detectable Nylon 6.6 and Polypropylene

- Metal impregnated material allows identification by metal detector inspection equipment to help meet food, beverage, and pharmaceutical safety standards, to help reduce product contamination, loss, and recall
- Nylon material for general purpose maintenance and repair applications; ideal for use in control panels and overhead cable runs

- Polypropylene material provides excellent chemical resistance for use in processing and packaging areas where aggressive acid and alkaline chemicals are use to clean the equipment
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation



Part Number	Length		Width		Thickness		Max. Bundle Dia.		Min. Loop Tensile Str.		Recommended Installation Tool	Material	Std. Pkg. Qty.	Std. Ctn. Qty.
	In.	mm	In.	mm	In.	mm	In.	mm	Lbs.	N				
Nylon 6.6														
Miniature Cross Section														
PLT1M-C86	3.9	100	0.098	2.5	0.044	1.1	.87	22	18	80	GTS-E, GS2B-E, STS2	Nylon 6.6	100	1000
Intermediate Cross Section														
PLT2I-C86	8.0	203	0.135	3.4	0.047	1.2	2.00	51	30	133	GTS-E, GS2B-E, STS2	Nylon 6.6	100	1000
Standard Cross Section														
PLT2S-C86	7.3	186	0.190	4.8	0.057	1.4	1.85	47	50	222	GTS-E, GS2B-E, GTH-E, GS4H-E, STS2, STH2	Nylon 6.6	100	1000
PLT3S-C86	11.5	291	0.190	4.8	0.057	1.4	3.00	76						
PLT4S-C86	14.4	366	0.190	4.8	0.057	1.4	4.00	102						
Light-Heavy Cross Section (Straight Tip)														
PLT3H-L86	11.1	282	0.300	7.6	0.075	1.9	3.00	76	120	534	GTH-E, GS4H-E, GS4EH-E, STH2, ST3EH	Nylon 6.6	50	500
PLT4H-L86	14.4	366	0.300	7.6	0.075	1.9	4.00	102						
Polypropylene														
Miniature Cross Section														
PLT1M-C186	3.9	100	0.098	2.5	0.044	1.1	0.87	22	15	67	GTS-E, GS2B-E, STS2	Polypropylene	100	1000
Intermediate Cross Section														
PLT2I-C186	8.0	203	0.135	3.4	0.047	1.2	2.00	51	18	80	GTS-E, GS2B-E, STS2	Polypropylene	100	1000
Standard Cross Section														
PLT2S-C186	7.3	186	0.190	4.8	0.057	1.4	1.85	47	30	133	GTS-E, GS2B-E, GTH-E, GS4H-E, STS2, STH2	Polypropylene	100	1000
PLT3S-C186	11.5	291	0.190	4.8	0.057	1.4	3.00	76						
PLT4S-C186	14.4	366	0.190	4.8	0.057	1.4	4.00	102						
Light-Heavy Cross Section (Straight Tip)														
PLT3H-L186	11.1	282	0.300	7.6	0.075	1.9	3.00	76	60	267	GTH-E, GS4H-E, GS4EH-E, STH2, ST3EH	Polypropylene	50	500
PLT4H-L186	14.4	366	0.300	7.6	0.075	1.9	4.00	102						



Part Number	Material	Used with Cable Ties*	A Lgth. In. mm	B Width In. mm	C Ht. In. mm	Counterbore Diameter In. (mm)	Mounting Method	Std. Pkg. Qty.	Std. Ctn. Qty.
Cable Tie Mounts									
TM2S8-C86	Nylon 6.6	Min., Int., Std.	0.630 (16.0)	0.422 (10.7)	0.275 (7.0)	0.325 (8.3)	#8 (M4) screw	100	500
TM3S8-C86	Nylon 6.6	Std., Lt. Hvy.	0.867 (22.0)	0.614 (15.6)	0.373 (9.5)	0.325 (8.3)	#8 (M4) screw		
TM3S10-C86		#10 (M5) screw							
TM2S8-C186	Polypropylene	Min., Int., Std.	0.630 (16.0)	0.422 (10.7)	0.275 (7.0)	0.325 (8.3)	#8 (M4) screw		
TM3S8-C186	Polypropylene	Std., Lt. Hvy.	0.867 (22.0)	0.614 (15.6)	0.373 (9.5)	0.325 (8.3)	#8 (M4) screw		
TM3S10-C186		#10 (M5) screw							